

DRILLING (SOLID CARBIDE)

MNS NEW



CARBIDE


Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	

		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	0 -0.031
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013




● 4.5mm or smaller diameter drills are designed with 2 coolant holes.

● **Type 1** MNS---DIN-C, MNS-C, MNS---LB, MNS---DB (Cylindrical shank type)

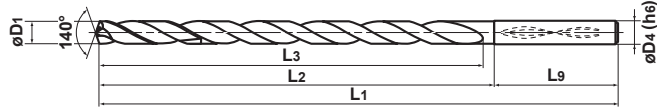

● **Type 2** MNS---S/L-DIN (Whistle notch shank type)

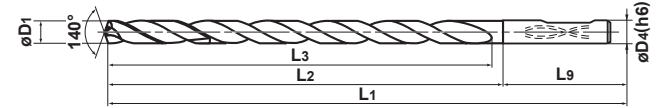

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
3.0	3	□	MNS0300S-DIN	62	26	20	36	6	2
	3	□	0300S-DIN-C	62	26	20	36	6	1
	5	□	0300L-DIN	66	30	28	36	6	2
	5	●	0300L-DIN-C	66	30	28	36	6	1
	8	□	0300-L8C	74	38	34	36	6	1
	10	□	0300-L10C	80	44	40	36	6	1
	12	●	0300-L12C	86	50	46	36	6	1
	15	□	0300-L15C	95	59	55	36	6	1
	20	●	0300-L20C	110	74	70	36	6	1
	25	□	0300-L25C	125	89	85	36	6	1
	30	●	0300-L30C	140	104	100	36	6	1
	5	★	0300LB	81	33	33	48	3	1
	10	★	0300X10DB	90	42	39	48	3	1
	20	★	0300X20DB	120	72	69	48	3	1
	30	★	0300X30DB	150	102	99	48	3	1
3.1	3	□	0310S-DIN	62	26	20	36	6	2
	3	□	0310S-DIN-C	62	26	20	36	6	1
	5	□	0310L-DIN	66	30	28	36	6	2
	5	□	0310L-DIN-C	66	30	28	36	6	1
	8	□	0310-L8C	80	44	40	36	6	1
	10	□	0310-L10C	87	51	47	36	6	1
	12	□	0310-L12C	94	58	54	36	6	1
	15	□	0310-L15C	104	68	64	36	6	1
	20	□	0310-L20C	122	86	82	36	6	1
	25	□	0310-L25C	139	103	99	36	6	1
	30	□	0310-L30C	157	121	117	36	6	1
	5	★	0310LB	87	39	39	48	4	1
	10	□	0310X10DB	97	49	46	48	4	1
	20	□	0310X20DB	132	84	81	48	4	1
	30	□	0310X30DB	167	119	116	48	4	1
3.2	3	□	0320S-DIN	62	26	20	36	6	2
	3	□	0320S-DIN-C	62	26	20	36	6	1
	5	□	0320L-DIN	66	30	28	36	6	2
	5	●	0320L-DIN-C	66	30	28	36	6	1
	8	□	0320-L8C	80	44	40	36	6	1
	10	□	0320-L10C	87	51	47	36	6	1
	12	●	0320-L12C	94	58	54	36	6	1
	15	□	0320-L15C	104	68	64	36	6	1
	20	□	0320-L20C	122	86	82	36	6	1
	25	□	0320-L25C	139	103	99	36	6	1
	30	□	0320-L30C	157	121	117	36	6	1
	5	★	0320LB	87	39	39	48	4	1
	10	★	0320X10DB	97	49	46	48	4	1
	20	★	0320X20DB	132	84	81	48	4	1
	30	★	0320X30DB	167	119	116	48	4	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
3.2	20	●	MNS0320-L20C	122	86	82	36	6	1
	25	□	0320-L25C	139	103	99	36	6	1
	30	●	0320-L30C	157	121	117	36	6	1
	5	★	0320LB	87	39	39	48	4	1
	10	★	0320X10DB	97	49	46	48	4	1
	20	★	0320X20DB	132	84	81	48	4	1
	30	★	0320X30DB	167	119	116	48	4	1
	3.3	3	□	0330S-DIN	62	26	20	36	6
3		□	0330S-DIN-C	62	26	20	36	6	1
5		□	0330L-DIN	66	30	28	36	6	2
5		●	0330L-DIN-C	66	30	28	36	6	1
8		□	0330-L8C	80	44	40	36	6	1
10		□	0330-L10C	87	51	47	36	6	1
12		●	0330-L12C	94	58	54	36	6	1
15		□	0330-L15C	104	68	64	36	6	1
20		●	0330-L20C	122	86	82	36	6	1
25		□	0330-L25C	139	103	99	36	6	1
30		●	0330-L30C	157	121	117	36	6	1
5		★	0330LB	87	39	39	48	4	1
10		□	0330X10DB	97	49	46	48	4	1
20		□	0330X20DB	132	84	81	48	4	1
30		□	0330X30DB	167	119	116	48	4	1
3.4	3	□	0340S-DIN	62	26	20	36	6	2
	3	□	0340S-DIN-C	62	26	20	36	6	1
	5	□	0340L-DIN	66	30	28	36	6	2
	5	□	0340L-DIN-C	66	30	28	36	6	1
	8	□	0340-L8C	80	44	40	36	6	1
	10	□	0340-L10C	87	51	47	36	6	1
	12	□	0340-L12C	94	58	54	36	6	1
	15	□	0340-L15C	104	68	64	36	6	1
	20	□	0340-L20C	122	86	82	36	6	1
	25	□	0340-L25C	139	103	99	36	6	1
	30	□	0340-L30C	157	121	117	36	6	1
	5	★	0340LB	87	39	39	48	4	1
	10	★	0340X10DB	97	49	46	48	4	1
	20	★	0340X20DB	132	84	81	48	4	1
	30	★	0340X30DB	167	119	116	48	4	1

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
3.5	3	□	MNS0350S-DIN	62	26	20	36	6	2
	3	□	0350S-DIN-C	62	26	20	36	6	1
	5	□	0350L-DIN	66	30	28	36	6	2
	5	●	0350L-DIN-C	66	30	28	36	6	1
	8	□	0350-L8C	80	44	40	36	6	1
	10	□	0350-L10C	87	51	47	36	6	1
	12	●	0350-L12C	94	58	54	36	6	1
	15	□	0350-L15C	104	68	64	36	6	1
	20	●	0350-L20C	122	86	82	36	6	1
	25	□	0350-L25C	139	103	99	36	6	1
	30	●	0350-L30C	157	121	117	36	6	1
	5	★	0350LB	87	39	39	48	4	1
	10	□	0350X10DB	97	49	46	48	4	1
	20	□	0350X20DB	132	84	81	48	4	1
30	□	0350X30DB	167	119	116	48	4	1	
3.6	3	□	0360S-DIN	62	26	20	36	6	2
	3	□	0360S-DIN-C	62	26	20	36	6	1
	5	□	0360L-DIN	66	30	28	36	6	2
	5	□	0360L-DIN-C	66	30	28	36	6	1
	8	□	0360-L8C	85	49	45	36	6	1
	10	□	0360-L10C	93	57	53	36	6	1
	12	□	0360-L12C	101	65	61	36	6	1
	15	□	0360-L15C	113	77	73	36	6	1
	20	□	0360-L20C	133	97	93	36	6	1
	25	□	0360-L25C	153	117	113	36	6	1
	30	□	0360-L30C	173	137	133	36	6	1
	5	★	0360LB	92	44	44	48	4	1
	10	★	0360X10DB	103	55	52	48	4	1
	20	★	0360X20DB	143	95	92	48	4	1
30	★	0360X30DB	183	135	132	48	4	1	
3.7	3	□	0370S-DIN	62	26	20	36	6	2
	3	□	0370S-DIN-C	62	26	20	36	6	1
	5	□	0370L-DIN	66	30	28	36	6	2
	5	□	0370L-DIN-C	66	30	28	36	6	1
	8	□	0370-L8C	85	49	45	36	6	1
	10	□	0370-L10C	93	57	53	36	6	1
	12	□	0370-L12C	101	65	61	36	6	1
	15	□	0370-L15C	113	77	73	36	6	1
	20	□	0370-L20C	133	97	93	36	6	1
	25	□	0370-L25C	153	117	113	36	6	1
	30	□	0370-L30C	173	137	133	36	6	1
	5	★	0370LB	92	44	44	48	4	1
	10	□	0370X10DB	103	55	52	48	4	1
	20	□	0370X20DB	143	95	92	48	4	1
30	□	0370X30DB	183	135	132	48	4	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
3.8	3	□	MNS0380S-DIN	66	30	24	36	6	2
	3	□	0380S-DIN-C	66	30	24	36	6	1
	5	□	0380L-DIN	74	38	36	36	6	2
	5	□	0380L-DIN-C	74	38	36	36	6	1
	8	□	0380-L8C	85	49	45	36	6	1
	10	□	0380-L10C	93	57	53	36	6	1
	12	□	0380-L12C	101	65	61	36	6	1
	15	□	0380-L15C	113	77	73	36	6	1
	20	□	0380-L20C	133	97	93	36	6	1
	25	□	0380-L25C	153	117	113	36	6	1
	30	□	0380-L30C	173	137	133	36	6	1
	5	★	0380LB	92	44	44	48	4	1
	10	□	0380X10DB	103	55	52	48	4	1
	20	□	0380X20DB	143	95	92	48	4	1
30	□	0380X30DB	183	135	132	48	4	1	
3.9	3	□	0390S-DIN	66	30	24	36	6	2
	3	□	0390S-DIN-C	66	30	24	36	6	1
	5	□	0390L-DIN	74	38	36	36	6	2
	5	□	0390L-DIN-C	74	38	36	36	6	1
	8	□	0390-L8C	85	49	45	36	6	1
	10	□	0390-L10C	93	57	53	36	6	1
	12	□	0390-L12C	101	65	61	36	6	1
	15	□	0390-L15C	113	77	73	36	6	1
	20	□	0390-L20C	133	97	93	36	6	1
	25	□	0390-L25C	153	117	113	36	6	1
	30	□	0390-L30C	173	137	133	36	6	1
	5	★	0390LB	92	44	44	48	4	1
	10	★	0390X10DB	103	55	52	48	4	1
	20	★	0390X20DB	143	95	92	48	4	1
30	★	0390X30DB	183	135	132	48	4	1	
4.0	3	□	0400S-DIN	66	30	24	36	6	2
	3	□	0400S-DIN-C	66	30	24	36	6	1
	5	□	0400L-DIN	74	38	36	36	6	2
	5	●	0400L-DIN-C	74	38	36	36	6	1
	8	□	0400-L8C	85	49	45	36	6	1
	10	□	0400-L10C	93	57	53	36	6	1
	12	●	0400-L12C	101	65	61	36	6	1
	15	□	0400-L15C	113	77	73	36	6	1
	20	●	0400-L20C	133	97	93	36	6	1
	25	□	0400-L25C	153	117	113	36	6	1
	30	●	0400-L30C	173	137	133	36	6	1
	5	★	0400LB	92	44	44	48	4	1
	10	★	0400X10DB	103	55	52	48	4	1
	20	★	0400X20DB	143	95	92	48	4	1
30	★	0400X30DB	183	135	132	48	4	1	

DRILLING SOLID CARBIDE



DRILLING (SOLID CARBIDE)

MNS NEW



CARBIDE


Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	

		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	0 -0.031
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013




● 4.5mm or smaller diameter drills are designed with 2 coolant holes.

● **Type 1** MNS---DIN-C, MNS-C, MNS---LB, MNS---DB (Cylindrical shank type)

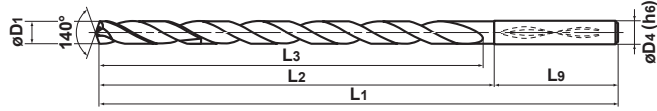

● **Type 2** MNS---S/L-DIN (Whistle notch shank type)

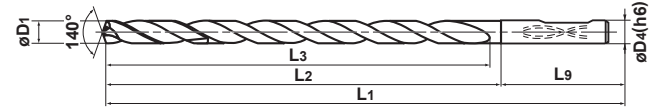

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
4.1	3	□	MNS0410S-DIN	66	30	24	36	6	2
	3	□	0410S-DIN-C	66	30	24	36	6	1
	5	□	0410L-DIN	74	38	36	36	6	2
	5	□	0410L-DIN-C	74	38	36	36	6	1
	8	□	0410-L8C	91	55	51	36	6	1
	10	□	0410-L10C	100	64	60	36	6	1
	12	□	0410-L12C	109	73	69	36	6	1
	15	□	0410-L15C	122	86	82	36	6	1
	20	□	0410-L20C	145	109	105	36	6	1
	25	□	0410-L25C	167	131	127	36	6	1
	30	□	0410-L30C	190	154	150	36	6	1
	5	★	0410LB	100	50	50	50	5	1
	10	□	0410X10DB	112	62	59	50	5	1
20	□	0410X20DB	157	107	104	50	5	1	
30	□	0410X30DB	202	152	149	50	5	1	
4.2	3	□	0420S-DIN	66	30	24	36	6	2
	3	□	0420S-DIN-C	66	30	24	36	6	1
	5	□	0420L-DIN	74	38	36	36	6	2
	5	●	0420L-DIN-C	74	38	36	36	6	1
	8	□	0420-L8C	91	55	51	36	6	1
	10	□	0420-L10C	100	64	60	36	6	1
	12	●	0420-L12C	109	73	69	36	6	1
	15	□	0420-L15C	122	86	82	36	6	1
	20	●	0420-L20C	145	109	105	36	6	1
	25	□	0420-L25C	167	131	127	36	6	1
	30	●	0420-L30C	190	154	150	36	6	1
	5	★	0420LB	100	50	50	50	5	1
	10	□	0420X10DB	112	62	59	50	5	1
20	□	0420X20DB	157	107	104	50	5	1	
30	□	0420X30DB	202	152	149	50	5	1	
4.3	3	□	0430S-DIN	66	30	24	36	6	2
	3	□	0430S-DIN-C	66	30	24	36	6	1
	5	□	0430L-DIN	74	38	36	36	6	2
	5	□	0430L-DIN-C	74	38	36	36	6	1
	8	□	0430-L8C	91	55	51	36	6	1
	10	□	0430-L10C	100	64	60	36	6	1
	12	□	0430-L12C	109	73	69	36	6	1
	15	□	0430-L15C	122	86	82	36	6	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
4.3	20	□	MNS0430-L20C	145	109	105	36	6	1
	25	□	0430-L25C	167	131	127	36	6	1
	30	□	0430-L30C	190	154	150	36	6	1
	5	★	0430LB	100	50	50	50	5	1
	10	□	0430X10DB	112	62	59	50	5	1
	20	□	0430X20DB	157	107	104	50	5	1
	30	□	0430X30DB	202	152	149	50	5	1
4.4	3	□	0440S-DIN	66	30	24	36	6	2
	3	□	0440S-DIN-C	66	30	24	36	6	1
	5	□	0440L-DIN	74	38	36	36	6	2
	5	□	0440L-DIN-C	74	38	36	36	6	1
	8	□	0440-L8C	91	55	51	36	6	1
	10	□	0440-L10C	100	64	60	36	6	1
	12	□	0440-L12C	109	73	69	36	6	1
	15	□	0440-L15C	122	86	82	36	6	1
	20	□	0440-L20C	145	109	105	36	6	1
	25	□	0440-L25C	167	131	127	36	6	1
	30	□	0440-L30C	190	154	150	36	6	1
	5	★	0440LB	100	50	50	50	5	1
	10	□	0440X10DB	112	62	59	50	5	1
20	□	0440X20DB	157	107	104	50	5	1	
30	□	0440X30DB	202	152	149	50	5	1	
4.5	3	□	0450S-DIN	66	30	24	36	6	2
	3	□	0450S-DIN-C	66	30	24	36	6	1
	5	□	0450L-DIN	74	38	36	36	6	2
	5	●	0450L-DIN-C	74	38	36	36	6	1
	8	□	0450-L8C	91	55	51	36	6	1
	10	□	0450-L10C	100	64	60	36	6	1
	12	●	0450-L12C	109	73	69	36	6	1
	15	□	0450-L15C	122	86	82	36	6	1
	20	●	0450-L20C	145	109	105	36	6	1
	25	□	0450-L25C	167	131	127	36	6	1
	30	●	0450-L30C	190	154	150	36	6	1
	5	★	0450LB	100	50	50	50	5	1
	10	□	0450X10DB	112	62	59	50	5	1
20	□	0450X20DB	157	107	104	50	5	1	
30	□	0450X30DB	202	152	149	50	5	1	


(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.




		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	0 -0.027
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013

●Type 1 MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

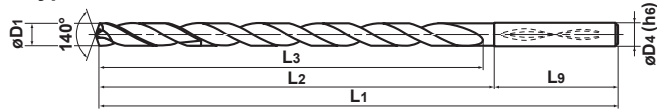

●Type 2 MNS----S/L-DIN (Whistle notch shank type)

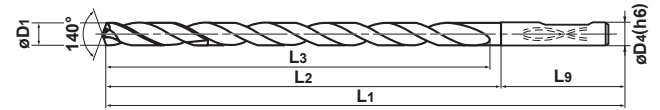

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
4.6	3	□	MNS0460S-DIN	66	30	24	36	6	2
	3	□	0460S-DIN-C	66	30	24	36	6	1
	5	□	0460L-DIN	74	38	36	36	6	2
	5	□	0460L-DIN-C	74	38	36	36	6	1
	8	□	0460-L8C	96	60	55	36	6	1
	10	□	0460-L10C	106	70	66	36	6	1
	12	□	0460-L12C	116	80	76	36	6	1
	15	□	0460-L15C	131	95	91	36	6	1
	20	□	0460-L20C	156	120	116	36	6	1
	25	□	0460-L25C	181	145	141	36	6	1
	30	□	0460-L30C	206	170	166	36	6	1
	5	★	0460LB	105	55	55	50	5	1
	10	□	0460X10DB	118	68	65	50	5	1
20	□	0460X20DB	168	118	115	50	5	1	
30	□	0460X30DB	218	168	165	50	5	1	
4.65	3	□	0465S-DIN	66	30	24	36	6	2
	3	□	0465S-DIN-C	66	30	24	36	6	1
	5	□	0465L-DIN	74	38	36	36	6	2
	5	●	0465L-DIN-C	74	38	36	36	6	1
4.7	3	□	0470S-DIN	66	30	24	36	6	2
	3	□	0470S-DIN-C	66	30	24	36	6	1
	5	□	0470L-DIN	74	38	36	36	6	2
	5	□	0470L-DIN-C	74	38	36	36	6	1
	8	□	0470-L8C	96	60	55	36	6	1
	10	□	0470-L10C	106	70	66	36	6	1
	12	□	0470-L12C	116	80	76	36	6	1
	15	□	0470-L15C	131	95	91	36	6	1
	20	□	0470-L20C	156	120	116	36	6	1
	25	□	0470-L25C	181	145	141	36	6	1
	30	□	0470-L30C	206	170	166	36	6	1
	5	★	0470LB	105	55	55	50	5	1
	10	□	0470X10DB	118	68	65	50	5	1
20	□	0470X20DB	168	118	115	50	5	1	
30	□	0470X30DB	218	168	165	50	5	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
4.8	3	□	MNS0480S-DIN	66	30	28	36	6	2
	3	□	0480S-DIN-C	66	30	28	36	6	1
	5	□	0480L-DIN	82	46	44	36	6	2
	5	□	0480L-DIN-C	82	46	44	36	6	1
	8	□	0480-L8C	96	60	55	36	6	1
	10	□	0480-L10C	106	70	66	36	6	1
	12	□	0480-L12C	116	80	76	36	6	1
	15	□	0480-L15C	131	95	91	36	6	1
	20	□	0480-L20C	156	120	116	36	6	1
	25	□	0480-L25C	181	145	141	36	6	1
	30	□	0480-L30C	206	170	166	36	6	1
	5	★	0480LB	105	55	55	50	5	1
	10	□	0480X10DB	118	68	65	50	5	1
20	□	0480X20DB	168	118	115	50	5	1	
30	□	0480X30DB	218	168	165	50	5	1	
4.9	3	□	0490S-DIN	66	30	28	36	6	2
	3	□	0490S-DIN-C	66	30	28	36	6	1
	5	□	0490L-DIN	82	46	44	36	6	2
	5	□	0490L-DIN-C	82	46	44	36	6	1
	8	□	0490-L8C	96	60	55	36	6	1
	10	□	0490-L10C	106	70	66	36	6	1
	12	□	0490-L12C	116	80	76	36	6	1
	15	□	0490-L15C	131	95	91	36	6	1
	20	□	0490-L20C	156	120	116	36	6	1
	25	□	0490-L25C	181	145	141	36	6	1
	30	□	0490-L30C	206	170	166	36	6	1
	5	★	0490LB	105	55	55	50	5	1
	10	★	0490X10DB	118	68	65	50	5	1
20	★	0490X20DB	168	118	115	50	5	1	
30	★	0490X30DB	218	168	165	50	5	1	

DRILLING (SOLID CARBIDE)

MNS NEW




Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	0 -0.031
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● Type 1 MNS---DIN-C, MNS-C, MNS---LB, MNS---DB (Cylindrical shank type)

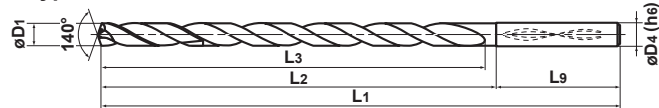

● Type 2 MNS---S/L-DIN (Whistle notch shank type)

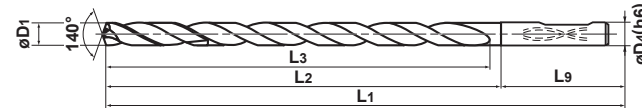

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
5.0	3	□	MNS0500S-DIN	66	30	28	36	6	2
	3	□	0500S-DIN-C	66	30	28	36	6	1
	5	□	0500L-DIN	82	46	44	36	6	2
	5	●	0500L-DIN-C	82	46	44	36	6	1
	8	□	0500-L8C	96	60	55	36	6	1
	10	□	0500-L10C	106	70	66	36	6	1
	12	●	0500-L12C	116	80	76	36	6	1
	15	□	0500-L15C	131	95	91	36	6	1
	20	●	0500-L20C	156	120	116	36	6	1
	25	□	0500-L25C	181	145	141	36	6	1
	30	●	0500-L30C	206	170	166	36	6	1
	5	★	0500LB	100	44	44	56	6	1
	10	★	0500X10DB	118	68	65	50	5	1
20	★	0500X20DB	168	118	115	50	5	1	
30	★	0500X30DB	218	168	165	50	5	1	
5.1	3	□	0510S-DIN	66	30	28	36	6	2
	3	□	0510S-DIN-C	66	30	28	36	6	1
	5	□	0510L-DIN	82	46	44	36	6	2
	5	●	0510L-DIN-C	82	46	44	36	6	1
	8	□	0510-L8C	102	66	62	36	6	1
	10	□	0510-L10C	113	77	73	36	6	1
	12	□	0510-L12C	124	88	84	36	6	1
	15	□	0510-L15C	140	104	100	36	6	1
	20	□	0510-L20C	168	132	128	36	6	1
	25	□	0510-L25C	195	159	155	36	6	1
	30	□	0510-L30C	223	187	183	36	6	1
	5	★	0510LB	100	44	44	56	6	1
	10	★	0510X10DB	127	75	72	52	6	1
20	★	0510X20DB	182	130	127	52	6	1	
30	★	0510X30DB	237	185	182	52	6	1	
5.2	3	□	0520S-DIN	66	30	28	36	6	2
	3	□	0520S-DIN-C	66	30	28	36	6	1
	5	□	0520L-DIN	82	46	44	36	6	2
	5	□	0520L-DIN-C	82	46	44	36	6	1
	8	□	0520-L8C	102	66	62	36	6	1
	10	□	0520-L10C	113	77	73	36	6	1
	12	□	0520-L12C	124	88	84	36	6	1
	15	□	0520-L15C	140	104	100	36	6	1
	20	□	0520-L20C	168	132	128	36	6	1
	25	□	0520-L25C	195	159	155	36	6	1
	30	□	0520-L30C	223	187	183	36	6	1
	5	★	0520LB	100	44	44	56	6	1
	10	□	0520X10DB	127	75	72	52	6	1
20	□	0520X20DB	182	130	127	52	6	1	
30	□	0520X30DB	237	185	182	52	6	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
5.2	20	□	MNS0520-L20C	168	132	128	36	6	1
	25	□	0520-L25C	195	159	155	36	6	1
	30	□	0520-L30C	223	187	183	36	6	1
	5	★	0520LB	100	44	44	56	6	1
	10	□	0520X10DB	127	75	72	52	6	1
	20	□	0520X20DB	182	130	127	52	6	1
	30	□	0520X30DB	237	185	182	52	6	1
5.3	3	□	0530S-DIN	66	30	28	36	6	2
	3	□	0530S-DIN-C	66	30	28	36	6	1
	5	□	0530L-DIN	82	46	44	36	6	2
	5	□	0530L-DIN-C	82	46	44	36	6	1
	8	□	0530-L8C	102	66	62	36	6	1
	10	□	0530-L10C	113	77	73	36	6	1
	12	□	0530-L12C	124	88	84	36	6	1
	15	□	0530-L15C	140	104	100	36	6	1
	20	□	0530-L20C	168	132	128	36	6	1
	25	□	0530-L25C	195	159	155	36	6	1
	30	□	0530-L30C	223	187	183	36	6	1
	5	★	0530LB	100	44	44	56	6	1
	10	□	0530X10DB	127	75	72	52	6	1
20	□	0530X20DB	182	130	127	52	6	1	
30	□	0530X30DB	237	185	182	52	6	1	
5.4	3	□	0540S-DIN	66	30	28	36	6	2
	3	□	0540S-DIN-C	66	30	28	36	6	1
	5	□	0540L-DIN	82	46	44	36	6	2
	5	□	0540L-DIN-C	82	46	44	36	6	1
	8	□	0540-L8C	102	66	62	36	6	1
	10	□	0540-L10C	113	77	73	36	6	1
	12	□	0540-L12C	124	88	84	36	6	1
	15	□	0540-L15C	140	104	100	36	6	1
	20	□	0540-L20C	168	132	128	36	6	1
	25	□	0540-L25C	195	159	155	36	6	1
	30	□	0540-L30C	223	187	183	36	6	1
	5	★	0540LB	100	44	44	56	6	1
	10	□	0540X10DB	127	75	72	52	6	1
20	□	0540X20DB	182	130	127	52	6	1	
30	□	0540X30DB	237	185	182	52	6	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
5.5	3	□	MNS0550S-DIN	66	30	28	36	6	2
	3	□	0550S-DIN-C	66	30	28	36	6	1
	5	□	0550L-DIN	82	46	44	36	6	2
	5	●	0550L-DIN-C	82	46	44	36	6	1
	8	□	0550-L8C	102	66	62	36	6	1
	10	□	0550-L10C	113	77	73	36	6	1
	12	●	0550-L12C	124	88	84	36	6	1
	15	□	0550-L15C	140	104	100	36	6	1
	20	●	0550-L20C	168	132	128	36	6	1
	25	□	0550-L25C	195	159	155	36	6	1
	30	●	0550-L30C	223	187	183	36	6	1
	5	★	0550LB	100	44	44	56	6	1
	10	★	0550X10DB	127	75	72	52	6	1
	20	★	0550X20DB	182	130	127	52	6	1
30	★	0550X30DB	237	185	182	52	6	1	
5.55	3	□	0555S-DIN	66	30	28	36	6	2
	3	□	0555S-DIN-C	66	30	28	36	6	1
	5	□	0555L-DIN	82	46	44	36	6	2
	5	●	0555L-DIN-C	82	46	44	36	6	1
5.6	3	□	0560S-DIN	66	30	28	36	6	2
	3	□	0560S-DIN-C	66	30	28	36	6	1
	5	□	0560L-DIN	82	46	44	36	6	2
	5	□	0560L-DIN-C	82	46	44	36	6	1
	8	□	0560-L8C	107	71	67	36	6	1
	10	□	0560-L10C	119	83	79	36	6	1
	12	□	0560-L12C	131	95	91	36	6	1
	15	□	0560-L15C	149	113	109	36	6	1
	20	□	0560-L20C	179	143	139	36	6	1
	25	□	0560-L25C	209	173	169	36	6	1
	30	□	0560-L30C	239	203	199	36	6	1
	5	★	0560LB	100	48	48	52	6	1
	10	□	0560X10DB	133	81	78	52	6	1
	20	□	0560X20DB	193	141	138	52	6	1
30	□	0560X30DB	253	201	198	52	6	1	
5.7	3	□	0570S-DIN	66	30	28	36	6	2
	3	□	0570S-DIN-C	66	30	28	36	6	1
	5	□	0570L-DIN	82	46	44	36	6	2
	5	□	0570L-DIN-C	82	46	44	36	6	1
	8	□	0570-L8C	107	71	67	36	6	1
	10	□	0570-L10C	119	83	79	36	6	1
	12	□	0570-L12C	131	95	91	36	6	1
	15	□	0570-L15C	149	113	109	36	6	1
	20	□	0570-L20C	179	143	139	36	6	1
	25	□	0570-L25C	209	173	169	36	6	1
	30	□	0570-L30C	239	203	199	36	6	1
	5	★	0570LB	100	48	48	52	6	1
	10	□	0570X10DB	133	81	78	52	6	1
	20	□	0570X20DB	193	141	138	52	6	1
30	□	0570X30DB	253	201	198	52	6	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
5.8	3	□	MNS0580S-DIN	66	30	28	36	6	2
	3	□	0580S-DIN-C	66	30	28	36	6	1
	5	□	0580L-DIN	82	46	44	36	6	2
	5	□	0580L-DIN-C	82	46	44	36	6	1
	8	□	0580-L8C	107	71	67	36	6	1
	10	□	0580-L10C	119	83	79	36	6	1
	12	□	0580-L12C	131	95	91	36	6	1
	15	□	0580-L15C	149	113	109	36	6	1
	20	□	0580-L20C	179	143	139	36	6	1
	25	□	0580-L25C	209	173	169	36	6	1
	30	□	0580-L30C	239	203	199	36	6	1
	5	★	0580LB	100	48	48	52	6	1
	10	□	0580X10DB	133	81	78	52	6	1
	20	□	0580X20DB	193	141	138	52	6	1
30	□	0580X30DB	253	201	198	52	6	1	
5.9	3	□	0590S-DIN	66	30	28	36	6	2
	3	□	0590S-DIN-C	66	30	28	36	6	1
	5	□	0590L-DIN	82	46	44	36	6	2
	5	□	0590L-DIN-C	82	46	44	36	6	1
	8	□	0590-L8C	107	71	67	36	6	1
	10	□	0590-L10C	119	83	79	36	6	1
	12	□	0590-L12C	131	95	91	36	6	1
	15	□	0590-L15C	149	113	109	36	6	1
	20	□	0590-L20C	179	143	139	36	6	1
	25	□	0590-L25C	209	173	169	36	6	1
	30	□	0590-L30C	239	203	199	36	6	1
	5	★	0590LB	100	48	48	52	6	1
	10	□	0590X10DB	133	81	78	52	6	1
	20	□	0590X20DB	193	141	138	52	6	1
30	□	0590X30DB	253	201	198	52	6	1	
6.0	3	□	0600S-DIN	66	30	28	36	6	2
	3	□	0600S-DIN-C	66	30	28	36	6	1
	5	□	0600L-DIN	82	46	44	36	6	2
	5	●	0600L-DIN-C	82	46	44	36	6	1
	8	□	0600-L8C	107	71	67	36	6	1
	10	□	0600-L10C	119	83	79	36	6	1
	12	●	0600-L12C	131	95	91	36	6	1
	15	□	0600-L15C	149	113	109	36	6	1
	20	●	0600-L20C	179	143	139	36	6	1
	25	□	0600-L25C	209	173	169	36	6	1
	30	●	0600-L30C	239	203	199	36	6	1
	5	★	0600LB	100	48	48	52	6	1
	10	★	0600X10DB	133	81	78	52	6	1
	20	★	0600X20DB	193	141	138	52	6	1
30	★	0600X30DB	253	201	198	52	6	1	

DRILLING SOLID CARBIDE



DRILLING (SOLID CARBIDE)

MNS NEW




CARBIDE

Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	0 -0.031
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS---DIN-C, MNS-C, MNS---LB, MNS---DB (Cylindrical shank type)

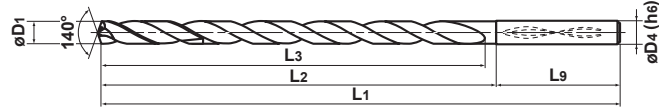

● **Type 2** MNS---S/L-DIN (Whistle notch shank type)

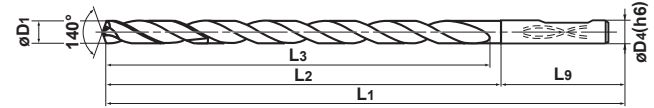

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
6.1	3	□	MNS0610S-DIN	79	43	34	36	8	2
	3	□	0610S-DIN-C	79	43	34	36	8	1
	5	□	0610L-DIN	91	55	53	36	8	2
	5	□	0610L-DIN-C	91	55	53	36	8	1
	8	□	0610-L8C	113	77	73	36	8	1
	10	□	0610-L10C	126	90	86	36	8	1
	12	□	0610-L12C	139	103	99	36	8	1
	15	□	0610-L15C	158	122	118	36	8	1
	20	□	0610-L20C	191	155	151	36	8	1
	25	□	0610-L25C	223	187	183	36	8	1
	30	□	0610-L30C	256	220	216	36	8	1
	5	★	0610LB	109	52	52	57	7	1
	10	★	0610X10DB	141	88	85	53	7	1
20	★	0610X20DB	206	153	150	53	7	1	
30	★	0610X30DB	271	218	215	53	7	1	
6.2	3	□	0620S-DIN	79	43	34	36	8	2
	3	□	0620S-DIN-C	79	43	34	36	8	1
	5	□	0620L-DIN	91	55	53	36	8	2
	5	□	0620L-DIN-C	91	55	53	36	8	1
	8	□	0620-L8C	113	77	73	36	8	1
	10	□	0620-L10C	126	90	86	36	8	1
	12	□	0620-L12C	139	103	99	36	8	1
	15	□	0620-L15C	158	122	118	36	8	1
	20	□	0620-L20C	191	155	151	36	8	1
	25	□	0620-L25C	223	187	183	36	8	1
	30	□	0620-L30C	256	220	216	36	8	1
	5	★	0620LB	109	52	52	57	7	1
	10	□	0620X10DB	141	88	85	53	7	1
20	□	0620X20DB	206	153	150	53	7	1	
30	□	0620X30DB	271	218	215	53	7	1	
6.3	3	□	0630S-DIN	79	43	34	36	8	2
	3	□	0630S-DIN-C	79	43	34	36	8	1
	5	□	0630L-DIN	91	55	53	36	8	2
	5	□	0630L-DIN-C	91	55	53	36	8	1
	8	□	0630-L8C	113	77	73	36	8	1
	10	□	0630-L10C	126	90	86	36	8	1
	12	□	0630-L12C	139	103	99	36	8	1
	15	□	0630-L15C	158	122	118	36	8	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
6.3	20	□	MNS0630-L20C	191	155	151	36	8	1
	25	□	0630-L25C	223	187	183	36	8	1
	30	□	0630-L30C	256	220	216	36	8	1
	5	★	0630LB	109	52	52	57	7	1
	10	□	0630X10DB	141	88	85	53	7	1
	20	□	0630X20DB	206	153	150	53	7	1
	30	□	0630X30DB	271	218	215	53	7	1
6.4	3	□	0640S-DIN	79	43	34	36	8	2
	3	□	0640S-DIN-C	79	43	34	36	8	1
	5	□	0640L-DIN	91	55	53	36	8	2
	5	□	0640L-DIN-C	91	55	53	36	8	1
	8	□	0640-L8C	113	77	73	36	8	1
	10	□	0640-L10C	126	90	86	36	8	1
	12	□	0640-L12C	139	103	99	36	8	1
	15	□	0640-L15C	158	122	118	36	8	1
	20	□	0640-L20C	191	155	151	36	8	1
	25	□	0640-L25C	223	187	183	36	8	1
	30	□	0640-L30C	256	220	216	36	8	1
	5	★	0640LB	109	52	52	57	7	1
	10	□	0640X10DB	141	88	85	53	7	1
20	□	0640X20DB	206	153	150	53	7	1	
30	□	0640X30DB	271	218	215	53	7	1	
6.5	3	□	0650S-DIN	79	43	34	36	8	2
	3	□	0650S-DIN-C	79	43	34	36	8	1
	5	□	0650L-DIN	91	55	53	36	8	2
	5	●	0650L-DIN-C	91	55	53	36	8	1
	8	□	0650-L8C	113	77	73	36	8	1
	10	□	0650-L10C	126	90	86	36	8	1
	12	●	0650-L12C	139	103	99	36	8	1
	15	□	0650-L15C	158	122	118	36	8	1
	20	●	0650-L20C	191	155	151	36	8	1
	25	□	0650-L25C	223	187	183	36	8	1
	30	●	0650-L30C	256	220	216	36	8	1
	5	★	0650LB	109	52	52	57	7	1
	10	★	0650X10DB	141	88	85	53	7	1
20	★	0650X20DB	206	153	150	53	7	1	
30	★	0650X30DB	271	218	215	53	7	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
6.6	3	□	MNS0660S-DIN	79	43	34	36	8	2
	3	□	0660S-DIN-C	79	43	34	36	8	1
	5	□	0660L-DIN	91	55	53	36	8	2
	5	□	0660L-DIN-C	91	55	53	36	8	1
	8	□	0660-L8C	118	82	78	36	8	1
	10	□	0660-L10C	132	96	92	36	8	1
	12	□	0660-L12C	146	110	106	36	8	1
	15	□	0660-L15C	167	131	127	36	8	1
	20	□	0660-L20C	202	166	162	36	8	1
	25	□	0660-L25C	237	201	197	36	8	1
	30	□	0660-L30C	272	236	232	36	8	1
	5	★	0660LB	109	56	56	53	7	1
	10	□	0660X10DB	147	94	91	53	7	1
20	□	0660X20DB	217	164	161	53	7	1	
30	□	0660X30DB	287	234	231	53	7	1	
6.7	3	□	0670S-DIN	79	43	34	36	8	2
	3	□	0670S-DIN-C	79	43	34	36	8	1
	5	□	0670L-DIN	91	55	53	36	8	2
	5	□	0670L-DIN-C	91	55	53	36	8	1
	8	□	0670-L8C	118	82	78	36	8	1
	10	□	0670-L10C	132	96	92	36	8	1
	12	□	0670-L12C	146	110	106	36	8	1
	15	□	0670-L15C	167	131	127	36	8	1
	20	□	0670-L20C	202	166	162	36	8	1
	25	□	0670-L25C	237	201	197	36	8	1
	30	□	0670-L30C	272	236	232	36	8	1
	5	★	0670LB	109	56	56	53	7	1
	10	★	0670X10DB	147	94	91	53	7	1
20	★	0670X20DB	217	164	161	53	7	1	
30	★	0670X30DB	287	234	231	53	7	1	
6.8	3	□	0680S-DIN	79	43	34	36	8	2
	3	□	0680S-DIN-C	79	43	34	36	8	1
	5	□	0680L-DIN	91	55	53	36	8	2
	5	●	0680L-DIN-C	91	55	53	36	8	1
	8	□	0680-L8C	118	82	78	36	8	1
	10	□	0680-L10C	132	96	92	36	8	1
	12	●	0680-L12C	146	110	106	36	8	1
	15	□	0680-L15C	167	131	127	36	8	1
	20	●	0680-L20C	202	166	162	36	8	1
	25	□	0680-L25C	237	201	197	36	8	1
	30	●	0680-L30C	272	236	232	36	8	1
	5	★	0680LB	109	56	56	53	7	1
	10	□	0680X10DB	147	94	91	53	7	1
20	□	0680X20DB	217	164	161	53	7	1	
30	□	0680X30DB	287	234	231	53	7	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
6.9	3	□	MNS0690S-DIN	79	43	34	36	8	2
	3	□	0690S-DIN-C	79	43	34	36	8	1
	5	□	0690L-DIN	91	55	53	36	8	2
	5	□	0690L-DIN-C	91	55	53	36	8	1
	8	□	0690-L8C	118	82	78	36	8	1
	10	□	0690-L10C	132	96	92	36	8	1
	12	□	0690-L12C	146	110	106	36	8	1
	15	□	0690-L15C	167	131	127	36	8	1
	20	□	0690-L20C	202	166	162	36	8	1
	25	□	0690-L25C	237	201	197	36	8	1
	30	□	0690-L30C	272	236	232	36	8	1
	5	★	0690LB	109	56	56	53	7	1
	10	□	0690X10DB	147	94	91	53	7	1
20	□	0690X20DB	217	164	161	53	7	1	
30	□	0690X30DB	287	234	231	53	7	1	
7.0	3	□	0700S-DIN	79	43	34	36	8	2
	3	□	0700S-DIN-C	79	43	34	36	8	1
	5	□	0700L-DIN	91	55	53	36	8	2
	5	●	0700L-DIN-C	91	55	53	36	8	1
	8	□	0700-L8C	118	82	78	36	8	1
	10	□	0700-L10C	132	96	92	36	8	1
	12	●	0700-L12C	146	110	106	36	8	1
	15	□	0700-L15C	167	131	127	36	8	1
	20	●	0700-L20C	202	166	162	36	8	1
	25	□	0700-L25C	237	201	197	36	8	1
	30	●	0700-L30C	272	236	232	36	8	1
	5	★	0700LB	109	56	56	53	7	1
	10	★	0700X10DB	147	94	91	53	7	1
20	★	0700X20DB	217	164	161	53	7	1	
30	★	0700X30DB	287	234	231	53	7	1	
7.1	3	□	0710S-DIN	79	43	41	36	8	2
	3	□	0710S-DIN-C	79	43	41	36	8	1
	5	□	0710L-DIN	91	55	53	36	8	2
	5	□	0710L-DIN-C	91	55	53	36	8	1
	8	□	0710-L8C	124	88	84	36	8	1
	10	□	0710-L10C	139	103	99	36	8	1
	12	□	0710-L12C	154	118	114	36	8	1
	15	□	0710-L15C	176	140	136	36	8	1
	20	□	0710-L20C	214	178	174	36	8	1
	25	□	0710-L25C	251	215	211	36	8	1
	30	□	0710-L30C	289	253	249	36	8	1
	5	★	0710LB	118	64	60	54	8	1
	10	□	0710X10DB	155	101	98	54	8	1
20	□	0710X20DB	230	176	173	54	8	1	
30	□	0710X30DB	305	251	248	54	8	1	

DRILLING SOLID CARBIDE



DRILLING (SOLID CARBIDE)

MNS NEW




CARBIDE

Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	0 -0.031
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

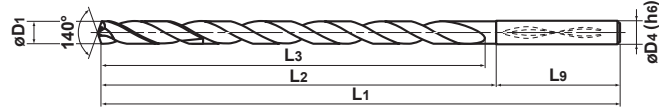

● **Type 2** MNS----S/L-DIN (Whistle notch shank type)

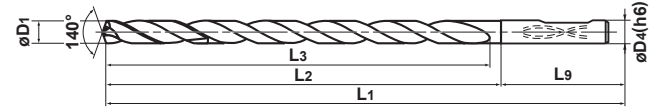

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
7.2	3	□	MNS0720S-DIN	79	43	41	36	8	2
	3	□	0720S-DIN-C	79	43	41	36	8	1
	5	□	0720L-DIN	91	55	53	36	8	2
	5	□	0720L-DIN-C	91	55	53	36	8	1
	8	□	0720-L8C	124	88	84	36	8	1
	10	□	0720-L10C	139	103	99	36	8	1
	12	□	0720-L12C	154	118	114	36	8	1
	15	□	0720-L15C	176	140	136	36	8	1
	20	□	0720-L20C	214	178	174	36	8	1
	25	□	0720-L25C	251	215	211	36	8	1
	30	□	0720-L30C	289	253	249	36	8	1
	5	★	0720LB	118	64	60	54	8	1
	10	★	0720X10DB	155	101	98	54	8	1
20	★	0720X20DB	230	176	173	54	8	1	
30	★	0720X30DB	305	251	248	54	8	1	
7.3	3	□	0730S-DIN	79	43	41	36	8	2
	3	□	0730S-DIN-C	79	43	41	36	8	1
	5	□	0730L-DIN	91	55	53	36	8	2
	5	□	0730L-DIN-C	91	55	53	36	8	1
	8	□	0730-L8C	124	88	84	36	8	1
	10	□	0730-L10C	139	103	99	36	8	1
	12	□	0730-L12C	154	118	114	36	8	1
	15	□	0730-L15C	176	140	136	36	8	1
	20	□	0730-L20C	214	178	174	36	8	1
	25	□	0730-L25C	251	215	211	36	8	1
	30	□	0730-L30C	289	253	249	36	8	1
	5	★	0730LB	118	64	60	54	8	1
	10	□	0730X10DB	155	101	98	54	8	1
20	□	0730X20DB	230	176	173	54	8	1	
30	□	0730X30DB	305	251	248	54	8	1	
7.4	3	□	0740S-DIN	79	43	41	36	8	2
	3	□	0740S-DIN-C	79	43	41	36	8	1
	5	□	0740L-DIN	91	55	53	36	8	2
	5	□	0740L-DIN-C	91	55	53	36	8	1
	8	□	0740-L8C	124	88	84	36	8	1
	10	□	0740-L10C	139	103	99	36	8	1
	12	□	0740-L12C	154	118	114	36	8	1
	15	□	0740-L15C	176	140	136	36	8	1
	20	□	0740-L20C	214	178	174	36	8	1
	25	□	0740-L25C	251	215	211	36	8	1
	30	□	0740-L30C	289	253	249	36	8	1
	5	★	0740LB	118	64	64	54	8	1
	10	□	0740X10DB	161	107	104	54	8	1
20	□	0740X20DB	241	187	184	54	8	1	
15	□	0740-L15C	176	140	136	36	8	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
7.4	20	□	MNS0740-L20C	214	178	174	36	8	1
	25	□	0740-L25C	251	215	211	36	8	1
	30	□	0740-L30C	289	253	249	36	8	1
	5	★	0740LB	118	64	60	54	8	1
	10	□	0740X10DB	155	101	98	54	8	1
	20	□	0740X20DB	230	176	173	54	8	1
	30	□	0740X30DB	305	251	248	54	8	1
7.5	3	□	0750S-DIN	79	43	41	36	8	2
	3	□	0750S-DIN-C	79	43	41	36	8	1
	5	□	0750L-DIN	91	55	53	36	8	2
	5	●	0750L-DIN-C	91	55	53	36	8	1
	8	□	0750-L8C	124	88	84	36	8	1
	10	□	0750-L10C	139	103	99	36	8	1
	12	●	0750-L12C	154	118	114	36	8	1
	15	□	0750-L15C	176	140	136	36	8	1
	20	●	0750-L20C	214	178	174	36	8	1
	25	□	0750-L25C	251	215	211	36	8	1
	30	●	0750-L30C	289	253	249	36	8	1
	5	★	0750LB	118	64	60	54	8	1
	10	□	0750X10DB	155	101	98	54	8	1
20	□	0750X20DB	230	176	173	54	8	1	
30	□	0750X30DB	305	251	248	54	8	1	
7.6	3	□	0760S-DIN	79	43	41	36	8	2
	3	□	0760S-DIN-C	79	43	41	36	8	1
	5	□	0760L-DIN	91	55	53	36	8	2
	5	□	0760L-DIN-C	91	55	53	36	8	1
	8	□	0760-L8C	129	93	89	36	8	1
	10	□	0760-L10C	145	109	105	36	8	1
	12	□	0760-L12C	161	125	121	36	8	1
	15	□	0760-L15C	185	149	145	36	8	1
	20	□	0760-L20C	225	189	185	36	8	1
	25	□	0760-L25C	265	229	225	36	8	1
	30	□	0760-L30C	305	269	265	36	8	1
	5	★	0760LB	118	64	64	54	8	1
	10	□	0760X10DB	161	107	104	54	8	1
20	□	0760X20DB	241	187	184	54	8	1	
30	□	0760X30DB	321	267	264	54	8	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
7.7	3	□	MNS0770S-DIN	79	43	41	36	8	2
	3	□	0770S-DIN-C	79	43	41	36	8	1
	5	□	0770L-DIN	91	55	53	36	8	2
	5	□	0770L-DIN-C	91	55	53	36	8	1
	8	□	0770-L8C	129	93	89	36	8	1
	10	□	0770-L10C	145	109	105	36	8	1
	12	□	0770-L12C	161	125	121	36	8	1
	15	□	0770-L15C	185	149	145	36	8	1
	20	□	0770-L20C	225	189	185	36	8	1
	25	□	0770-L25C	265	229	225	36	8	1
	30	□	0770-L30C	305	269	265	36	8	1
	5	★	0770LB	118	64	64	54	8	1
	10	□	0770X10DB	161	107	104	54	8	1
	20	□	0770X20DB	241	187	184	54	8	1
30	□	0770X30DB	321	267	264	54	8	1	
7.8	3	□	0780S-DIN	79	43	41	36	8	2
	3	□	0780S-DIN-C	79	43	41	36	8	1
	5	□	0780L-DIN	91	55	53	36	8	2
	5	□	0780L-DIN-C	91	55	53	36	8	1
	8	□	0780-L8C	129	93	89	36	8	1
	10	□	0780-L10C	145	109	105	36	8	1
	12	□	0780-L12C	161	125	121	36	8	1
	15	□	0780-L15C	185	149	145	36	8	1
	20	□	0780-L20C	225	189	185	36	8	1
	25	□	0780-L25C	265	229	225	36	8	1
	30	□	0780-L30C	305	269	265	36	8	1
	5	★	0780LB	118	64	64	54	8	1
	10	★	0780X10DB	161	107	104	54	8	1
	20	★	0780X20DB	241	187	184	54	8	1
30	★	0780X30DB	321	267	264	54	8	1	
7.9	3	□	0790S-DIN	79	43	41	36	8	2
	3	□	0790S-DIN-C	79	43	41	36	8	1
	5	□	0790L-DIN	91	55	53	36	8	2
	5	□	0790L-DIN-C	91	55	53	36	8	1
	8	□	0790-L8C	129	93	89	36	8	1
	10	□	0790-L10C	145	109	105	36	8	1
	12	□	0790-L12C	161	125	121	36	8	1
	15	□	0790-L15C	185	149	145	36	8	1
	20	□	0790-L20C	225	189	185	36	8	1
	25	□	0790-L25C	265	229	225	36	8	1
	30	□	0790-L30C	305	269	265	36	8	1
	5	★	0790LB	118	64	64	54	8	1
	10	□	0790X10DB	161	107	104	54	8	1
	20	□	0790X20DB	241	187	184	54	8	1
30	□	0790X30DB	321	267	264	54	8	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
8.0	3	□	MNS0800S-DIN	79	43	41	36	8	2
	3	□	0800S-DIN-C	79	43	41	36	8	1
	5	□	0800L-DIN	91	55	53	36	8	2
	5	●	0800L-DIN-C	91	55	53	36	8	1
	8	□	0800-L8C	129	93	89	36	8	1
	10	□	0800-L10C	145	109	105	36	8	1
	12	●	0800-L12C	161	125	121	36	8	1
	15	□	0800-L15C	185	149	145	36	8	1
	20	●	0800-L20C	225	189	185	36	8	1
	25	□	0800-L25C	265	229	225	36	8	1
	30	●	0800-L30C	305	269	265	36	8	1
	5	★	0800LB	118	64	64	54	8	1
	10	★	0800X10DB	161	107	104	54	8	1
	20	★	0800X20DB	241	187	184	54	8	1
30	★	0800X30DB	321	267	264	54	8	1	
8.1	3	□	0810S-DIN	88	48	46	40	10	2
	3	□	0810S-DIN-C	88	48	46	40	10	1
	5	□	0810L-DIN	102	62	60	40	10	2
	5	□	0810L-DIN-C	102	62	60	40	10	1
	8	□	0810-L8C	139	99	95	40	10	1
	10	□	0810-L10C	156	116	112	40	10	1
	12	□	0810-L12C	173	133	129	40	10	1
	15	□	0810-L15C	198	158	154	40	10	1
	20	□	0810-L20C	241	201	197	40	10	1
	25	□	0810-L25C	283	243	239	40	10	1
	30	□	0810-L30C	326	286	282	40	10	1
	5	★	0810LB	127	72	68	55	9	1
	10	□	0810X10DB	169	114	111	55	9	1
	20	□	0810X20DB	254	199	196	55	9	1
30	□	0810X30DB	339	284	281	55	9	1	
8.2	3	□	0820S-DIN	88	48	46	40	10	2
	3	□	0820S-DIN-C	88	48	46	40	10	1
	5	□	0820L-DIN	102	62	60	40	10	2
	5	□	0820L-DIN-C	102	62	60	40	10	1
	8	□	0820-L8C	139	99	95	40	10	1
	10	□	0820-L10C	156	116	112	40	10	1
	12	□	0820-L12C	173	133	129	40	10	1
	15	□	0820-L15C	198	158	154	40	10	1
	20	□	0820-L20C	241	201	197	40	10	1
	25	□	0820-L25C	283	243	239	40	10	1
	30	□	0820-L30C	326	286	282	40	10	1
	5	★	0820LB	127	72	68	55	9	1
	10	□	0820X10DB	169	114	111	55	9	1
	20	□	0820X20DB	254	199	196	55	9	1
30	□	0820X30DB	339	284	281	55	9	1	

DRILLING SOLID CARBIDE



DRILLING (SOLID CARBIDE)

MNS NEW




Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

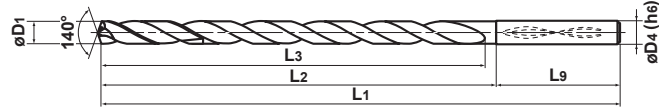

● **Type 2** MNS----S/L-DIN (Whistle notch shank type)

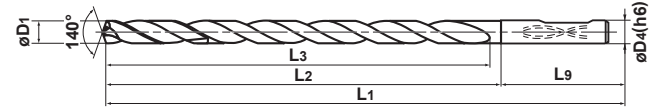

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
8.3	3	□	MNS0830S-DIN	88	48	46	40	10	2
	3	□	0830S-DIN-C	88	48	46	40	10	1
	5	□	0830L-DIN	102	62	60	40	10	2
	5	□	0830L-DIN-C	102	62	60	40	10	1
	8	□	0830-L8C	139	99	95	40	10	1
	10	□	0830-L10C	156	116	112	40	10	1
	12	□	0830-L12C	173	133	129	40	10	1
	15	□	0830-L15C	198	158	154	40	10	1
	20	□	0830-L20C	241	201	197	40	10	1
	25	□	0830-L25C	283	243	239	40	10	1
	30	□	0830-L30C	326	286	282	40	10	1
	5	★	0830LB	127	72	68	55	9	1
	10	□	0830X10DB	169	114	111	55	9	1
20	□	0830X20DB	254	199	196	55	9	1	
30	□	0830X30DB	339	284	281	55	9	1	
8.4	3	□	0840S-DIN	88	48	46	40	10	2
	3	□	0840S-DIN-C	88	48	46	40	10	1
	5	□	0840L-DIN	102	62	60	40	10	2
	5	□	0840L-DIN-C	102	62	60	40	10	1
	8	□	0840-L8C	139	99	95	40	10	1
	10	□	0840-L10C	156	116	112	40	10	1
	12	□	0840-L12C	173	133	129	40	10	1
	15	□	0840-L15C	198	158	154	40	10	1
	20	□	0840-L20C	241	201	197	40	10	1
	25	□	0840-L25C	283	243	239	40	10	1
	30	□	0840-L30C	326	286	282	40	10	1
	5	★	0840LB	127	72	68	55	9	1
	10	□	0840X10DB	169	114	111	55	9	1
20	□	0840X20DB	254	199	196	55	9	1	
30	□	0840X30DB	339	284	281	55	9	1	
8.5	3	□	0850S-DIN	88	48	46	40	10	2
	3	□	0850S-DIN-C	88	48	46	40	10	1
	5	□	0850L-DIN	102	62	60	40	10	2
	5	●	0850L-DIN-C	102	62	60	40	10	1
	8	□	0850-L8C	139	99	95	40	10	1
	10	□	0850-L10C	156	116	112	40	10	1
	12	●	0850-L12C	173	133	129	40	10	1
	15	□	0850-L15C	198	158	154	40	10	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
8.5	20	●	MNS0850-L20C	241	201	197	40	10	1
	25	□	0850-L25C	283	243	239	40	10	1
	30	●	0850-L30C	326	286	282	40	10	1
	5	★	0850LB	127	72	68	55	9	1
	10	□	0850X10DB	169	114	111	55	9	1
	20	□	0850X20DB	254	199	196	55	9	1
	30	□	0850X30DB	339	284	281	55	9	1
8.6	3	□	0860S-DIN	88	48	46	40	10	2
	3	□	0860S-DIN-C	88	48	46	40	10	1
	5	□	0860L-DIN	102	62	60	40	10	2
	5	□	0860L-DIN-C	102	62	60	40	10	1
	8	□	0860-L8C	144	104	100	40	10	1
	10	□	0860-L10C	162	122	118	40	10	1
	12	□	0860-L12C	180	140	136	40	10	1
	15	□	0860-L15C	207	167	163	40	10	1
	20	□	0860-L20C	252	212	208	40	10	1
	25	□	0860-L25C	297	257	253	40	10	1
	30	□	0860-L30C	342	302	298	40	10	1
	5	★	0860LB	127	72	72	55	9	1
	10	□	0860X10DB	175	120	117	55	9	1
20	□	0860X20DB	265	210	207	55	9	1	
30	□	0860X30DB	355	300	297	55	9	1	
8.7	3	□	0870S-DIN	88	48	46	40	10	2
	3	□	0870S-DIN-C	88	48	46	40	10	1
	5	□	0870L-DIN	102	62	60	40	10	2
	5	□	0870L-DIN-C	102	62	60	40	10	1
	8	□	0870-L8C	144	104	100	40	10	1
	10	□	0870-L10C	162	122	118	40	10	1
	12	□	0870-L12C	180	140	136	40	10	1
	15	□	0870-L15C	207	167	163	40	10	1
	20	□	0870-L20C	252	212	208	40	10	1
	25	□	0870-L25C	297	257	253	40	10	1
	30	□	0870-L30C	342	302	298	40	10	1
	5	★	0870LB	127	72	72	55	9	1
	10	□	0870X10DB	175	120	117	55	9	1
20	□	0870X20DB	265	210	207	55	9	1	
30	□	0870X30DB	355	300	297	55	9	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
8.8	3	□	MNS0880S-DIN	88	48	46	40	10	2
	3	□	0880S-DIN-C	88	48	46	40	10	1
	5	□	0880L-DIN	102	62	60	40	10	2
	5	□	0880L-DIN-C	102	62	60	40	10	1
	8	□	0880-L8C	144	104	100	40	10	1
	10	□	0880-L10C	162	122	118	40	10	1
	12	□	0880-L12C	180	140	136	40	10	1
	15	□	0880-L15C	207	167	163	40	10	1
	20	□	0880-L20C	252	212	208	40	10	1
	25	□	0880-L25C	297	257	253	40	10	1
	30	□	0880-L30C	342	302	298	40	10	1
	5	★	0880LB	127	72	72	55	9	1
	10	□	0880X10DB	175	120	117	55	9	1
20	□	0880X20DB	265	210	207	55	9	1	
30	□	0880X30DB	355	300	297	55	9	1	
8.9	3	□	0890S-DIN	88	48	46	40	10	2
	3	□	0890S-DIN-C	88	48	46	40	10	1
	5	□	0890L-DIN	102	62	60	40	10	2
	5	□	0890L-DIN-C	102	62	60	40	10	1
	8	□	0890-L8C	144	104	100	40	10	1
	10	□	0890-L10C	162	122	118	40	10	1
	12	□	0890-L12C	180	140	136	40	10	1
	15	□	0890-L15C	207	167	163	40	10	1
	20	□	0890-L20C	252	212	208	40	10	1
	25	□	0890-L25C	297	257	253	40	10	1
	30	□	0890-L30C	342	302	298	40	10	1
	5	★	0890LB	127	72	72	55	9	1
	10	□	0890X10DB	175	120	117	55	9	1
20	□	0890X20DB	265	210	207	55	9	1	
30	□	0890X30DB	355	300	297	55	9	1	
9.0	3	□	0900S-DIN	88	48	46	40	10	2
	3	□	0900S-DIN-C	88	48	46	40	10	1
	5	□	0900L-DIN	102	62	60	40	10	2
	5	●	0900L-DIN-C	102	62	60	40	10	1
	8	□	0900-L8C	144	104	100	40	10	1
	10	□	0900-L10C	162	122	118	40	10	1
	12	●	0900-L12C	180	140	136	40	10	1
	15	□	0900-L15C	207	167	163	40	10	1
	20	●	0900-L20C	252	212	208	40	10	1
	25	□	0900-L25C	297	257	253	40	10	1
	30	●	0900-L30C	342	302	298	40	10	1
	5	★	0900LB	127	72	72	55	9	1
	10	★	0900X10DB	175	120	117	55	9	1
20	★	0900X20DB	265	210	207	55	9	1	
30	★	0900X30DB	355	300	297	55	9	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
9.1	3	□	MNS0910S-DIN	89	49	47	40	10	2
	3	□	0910S-DIN-C	89	49	47	40	10	1
	5	□	0910L-DIN	103	63	62	40	10	2
	5	□	0910L-DIN-C	103	63	62	40	10	1
	8	□	0910-L8C	151	111	107	40	10	1
	10	□	0910-L10C	170	130	126	40	10	1
	12	□	0910-L12C	189	149	145	40	10	1
	15	□	0910-L15C	217	177	173	40	10	1
	20	□	0910-L20C	265	225	221	40	10	1
	25	□	0910-L25C	312	272	268	40	10	1
	30	□	0910-L30C	360	320	316	40	10	1
	5	★	0910LB	136	80	76	56	10	1
	10	□	0910X10DB	182	127	124	55	10	1
20	□	0910X20DB	277	222	219	55	10	1	
30	□	0910X30DB	372	317	314	55	10	1	
9.2	3	□	0920S-DIN	89	49	47	40	10	2
	3	□	0920S-DIN-C	89	49	47	40	10	1
	5	□	0920L-DIN	103	63	62	40	10	2
	5	□	0920L-DIN-C	103	63	62	40	10	1
	8	□	0920-L8C	151	111	107	40	10	1
	10	□	0920-L10C	170	130	126	40	10	1
	12	□	0920-L12C	189	149	145	40	10	1
	15	□	0920-L15C	217	177	173	40	10	1
	20	□	0920-L20C	265	225	221	40	10	1
	25	□	0920-L25C	312	272	268	40	10	1
	30	□	0920-L30C	360	320	316	40	10	1
	5	★	0920LB	136	80	76	56	10	1
	10	□	0920X10DB	182	127	124	55	10	1
20	□	0920X20DB	277	222	219	55	10	1	
30	□	0920X30DB	372	317	314	55	10	1	
9.3	3	□	0930S-DIN	89	49	47	40	10	2
	3	□	0930S-DIN-C	89	49	47	40	10	1
	5	□	0930L-DIN	103	63	62	40	10	2
	5	□	0930L-DIN-C	103	63	62	40	10	1
	8	□	0930-L8C	151	111	107	40	10	1
	10	□	0930-L10C	170	130	126	40	10	1
	12	□	0930-L12C	189	149	145	40	10	1
	15	□	0930-L15C	217	177	173	40	10	1
	20	□	0930-L20C	265	225	221	40	10	1
	25	□	0930-L25C	312	272	268	40	10	1
	30	□	0930-L30C	360	320	316	40	10	1
	5	★	0930LB	136	80	76	56	10	1
	10	□	0930X10DB	182	127	124	55	10	1
20	□	0930X20DB	277	222	219	55	10	1	
30	□	0930X30DB	372	317	314	55	10	1	

DRILLING SOLID CARBIDE



DRILLING (SOLID CARBIDE)

MNS NEW




Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

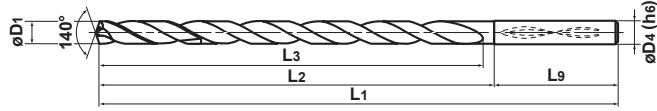

● **Type 2** MNS----S/L-DIN (Whistle notch shank type)

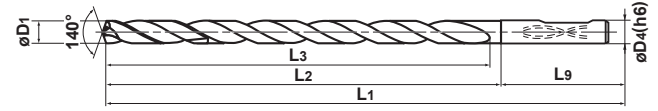

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
9.4	3	□	MNS0940S-DIN	89	49	47	40	10	2
	3	□	0940S-DIN-C	89	49	47	40	10	1
	5	□	0940L-DIN	103	63	62	40	10	2
	5	□	0940L-DIN-C	103	63	62	40	10	1
	8	□	0940-L8C	151	111	107	40	10	1
	10	□	0940-L10C	170	130	126	40	10	1
	12	□	0940-L12C	189	149	145	40	10	1
	15	□	0940-L15C	217	177	173	40	10	1
	20	□	0940-L20C	265	225	221	40	10	1
	25	□	0940-L25C	312	272	268	40	10	1
	30	□	0940-L30C	360	320	316	40	10	1
	5	★	0940LB	136	80	76	56	10	1
	10	□	0940X10DB	182	127	124	55	10	1
20	□	0940X20DB	277	222	219	55	10	1	
30	□	0940X30DB	372	317	314	55	10	1	
9.5	3	□	0950S-DIN	89	49	47	40	10	2
	3	□	0950S-DIN-C	89	49	47	40	10	1
	5	□	0950L-DIN	103	63	62	40	10	2
	5	●	0950L-DIN-C	103	63	62	40	10	1
	8	□	0950-L8C	151	111	107	40	10	1
	10	□	0950-L10C	170	130	126	40	10	1
	12	●	0950-L12C	189	149	145	40	10	1
	15	□	0950-L15C	217	177	173	40	10	1
	20	●	0950-L20C	265	225	221	40	10	1
	25	□	0950-L25C	312	272	268	40	10	1
	30	●	0950-L30C	360	320	316	40	10	1
	5	★	0950LB	136	80	76	56	10	1
	10	□	0950X10DB	182	127	124	55	10	1
20	□	0950X20DB	277	222	219	55	10	1	
30	□	0950X30DB	372	317	314	55	10	1	
9.6	3	□	0960S-DIN	89	49	47	40	10	2
	3	□	0960S-DIN-C	89	49	47	40	10	1
	5	□	0960L-DIN	103	63	62	40	10	2
	5	●	0960L-DIN-C	103	63	62	40	10	1
	8	□	0960-L8C	156	116	112	40	10	1
	10	□	0960-L10C	176	136	132	40	10	1
	12	□	0960-L12C	196	156	152	40	10	1
	15	□	0960-L15C	226	186	182	40	10	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
9.6	20	□	MNS0960-L20C	276	236	232	40	10	1
	25	□	0960-L25C	326	286	282	40	10	1
	30	□	0960-L30C	376	336	332	40	10	1
	5	★	0960LB	136	80	80	56	10	1
	10	□	0960X10DB	188	133	130	55	10	1
	20	□	0960X20DB	288	233	230	55	10	1
	30	□	0960X30DB	388	333	330	55	10	1
9.7	3	□	0970S-DIN	89	49	47	40	10	2
	3	□	0970S-DIN-C	89	49	47	40	10	1
	5	□	0970L-DIN	103	63	62	40	10	2
	5	□	0970L-DIN-C	103	63	62	40	10	1
	8	□	0970-L8C	156	116	112	40	10	1
	10	□	0970-L10C	176	136	132	40	10	1
	12	□	0970-L12C	196	156	152	40	10	1
	15	□	0970-L15C	226	186	182	40	10	1
	20	□	0970-L20C	276	236	232	40	10	1
	25	□	0970-L25C	326	286	282	40	10	1
	30	□	0970-L30C	376	336	332	40	10	1
	5	★	0970LB	136	80	80	56	10	1
	10	□	0970X10DB	188	133	130	55	10	1
20	□	0970X20DB	288	233	230	55	10	1	
30	□	0970X30DB	388	333	330	55	10	1	
9.8	3	□	0980S-DIN	89	49	47	40	10	2
	3	□	0980S-DIN-C	89	49	47	40	10	1
	5	□	0980L-DIN	103	63	62	40	10	2
	5	□	0980L-DIN-C	103	63	62	40	10	1
	8	□	0980-L8C	156	116	112	40	10	1
	10	□	0980-L10C	176	136	132	40	10	1
	12	□	0980-L12C	196	156	152	40	10	1
	15	□	0980-L15C	226	186	182	40	10	1
	20	□	0980-L20C	276	236	232	40	10	1
	25	□	0980-L25C	326	286	282	40	10	1
	30	□	0980-L30C	376	336	332	40	10	1
	5	★	0980LB	136	80	80	56	10	1
	10	★	0980X10DB	188	133	130	55	10	1
20	★	0980X20DB	288	233	230	55	10	1	
30	★	0980X30DB	388	333	330	55	10	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.

DRILLING SOLID CARBIDE

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
9.9	3	□	MNS0990S-DIN	89	49	47	40	10	2
	3	□	0990S-DIN-C	89	49	47	40	10	1
	5	□	0990L-DIN	103	63	62	40	10	2
	5	□	0990L-DIN-C	103	63	62	40	10	1
	8	□	0990-L8C	156	116	112	40	10	1
	10	□	0990-L10C	176	136	132	40	10	1
	12	□	0990-L12C	196	156	152	40	10	1
	15	□	0990-L15C	226	186	182	40	10	1
	20	□	0990-L20C	276	236	232	40	10	1
	25	□	0990-L25C	326	286	282	40	10	1
	30	□	0990-L30C	376	336	332	40	10	1
	5	★	0990LB	136	80	80	56	10	1
	10	□	0990X10DB	188	133	130	55	10	1
	20	□	0990X20DB	288	233	230	55	10	1
30	□	0990X30DB	388	333	330	55	10	1	
10.0	3	□	1000S-DIN	89	49	47	40	10	2
	3	□	1000S-DIN-C	89	49	47	40	10	1
	5	□	1000L-DIN	103	63	62	40	10	2
	5	●	1000L-DIN-C	103	63	62	40	10	1
	8	□	1000-L8C	156	116	112	40	10	1
	10	□	1000-L10C	176	136	132	40	10	1
	12	●	1000-L12C	196	156	152	40	10	1
	15	□	1000-L15C	226	186	182	40	10	1
	20	●	1000-L20C	276	236	232	40	10	1
	25	□	1000-L25C	326	286	282	40	10	1
	30	●	1000-L30C	376	336	332	40	10	1
	5	★	1000LB	136	80	80	56	10	1
	10	★	1000X10DB	188	133	130	55	10	1
	20	★	1000X20DB	288	233	230	55	10	1
30	★	1000X30DB	388	333	330	55	10	1	
10.1	3	□	1010S-DIN	102	57	55	45	12	2
	3	□	1010S-DIN-C	102	57	55	45	12	1
	5	□	1010L-DIN	118	73	71	45	12	2
	5	□	1010L-DIN-C	118	73	71	45	12	1
	8	□	1010-L8C	167	122	118	45	12	1
	10	□	1010-L10C	188	143	139	45	12	1
	12	□	1010-L12C	209	164	160	45	12	1
	15	□	1010-L15C	240	195	191	45	12	1
	20	□	1010-L20C	293	248	244	45	12	1
	25	□	1010-L25C	345	300	296	45	12	1
	5	★	1010LB	149	88	84	61	11	1
	10	□	1010X10DB	201	140	137	61	11	1
	20	□	1010X20DB	306	245	242	61	11	1
	10.2	3	□	1020S-DIN	102	57	55	45	12
3		□	1020S-DIN-C	102	57	55	45	12	1
5		□	1020L-DIN	118	73	71	45	12	2
5		□	1020L-DIN-C	118	73	71	45	12	1
8		□	1020-L8C	167	122	118	45	12	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type	
				L1	L2	L3	L9	D4		
10.2	10	□	MNS1020-L10C	188	143	139	45	12	1	
	12	□	1020-L12C	209	164	160	45	12	1	
	15	□	1020-L15C	240	195	191	45	12	1	
	20	□	1020-L20C	293	248	244	45	12	1	
	25	□	1020-L25C	345	300	296	45	12	1	
	5	★	1020LB	149	88	84	61	11	1	
	10	□	1020X10DB	201	140	137	61	11	1	
	20	□	1020X20DB	306	245	242	61	11	1	
	10.3	3	□	1030S-DIN	102	57	55	45	12	2
		3	□	1030S-DIN-C	102	57	55	45	12	1
5		□	1030L-DIN	118	73	71	45	12	2	
5		□	1030L-DIN-C	118	73	71	45	12	1	
8		□	1030-L8C	167	122	118	45	12	1	
10		□	1030-L10C	188	143	139	45	12	1	
12		□	1030-L12C	209	164	160	45	12	1	
15		□	1030-L15C	240	195	191	45	12	1	
20		□	1030-L20C	293	248	244	45	12	1	
25		□	1030-L25C	345	300	296	45	12	1	
10.4	5	★	1030LB	149	88	84	61	11	1	
	10	□	1030X10DB	201	140	137	61	11	1	
	20	□	1030X20DB	306	245	242	61	11	1	
	3	□	1040S-DIN	102	57	55	45	12	2	
	3	□	1040S-DIN-C	102	57	55	45	12	1	
	5	□	1040L-DIN	118	73	71	45	12	2	
	5	□	1040L-DIN-C	118	73	71	45	12	1	
	8	□	1040-L8C	167	122	118	45	12	1	
	10	□	1040-L10C	188	143	139	45	12	1	
	12	□	1040-L12C	209	164	160	45	12	1	
10.5	15	□	1040-L15C	240	195	191	45	12	1	
	20	□	1040-L20C	293	248	244	45	12	1	
	25	□	1040-L25C	345	300	296	45	12	1	
	5	★	1040LB	149	88	84	61	11	1	
	10	□	1040X10DB	201	140	137	61	11	1	
	20	□	1040X20DB	306	245	242	61	11	1	
	3	□	1050S-DIN	102	57	55	45	12	2	
	3	□	1050S-DIN-C	102	57	55	45	12	1	
	5	□	1050L-DIN	118	73	71	45	12	2	
	5	●	1050L-DIN-C	118	73	71	45	12	1	
8	□	1050-L8C	167	122	118	45	12	1		
10	□	1050-L10C	188	143	139	45	12	1		
12	●	1050-L12C	209	164	160	45	12	1		
15	□	1050-L15C	240	195	191	45	12	1		
20	●	1050-L20C	293	248	244	45	12	1		
25	□	1050-L25C	345	300	296	45	12	1		
5	★	1050LB	149	88	84	61	11	1		
10	★	1050X10DB	201	140	137	61	11	1		
20	★	1050X20DB	306	245	242	61	11	1		



DRILLING (SOLID CARBIDE)

MNS NEW




Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

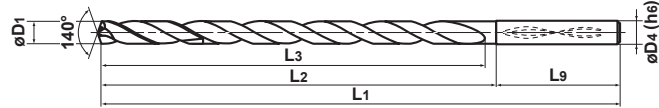

● **Type 2** MNS----S/L-DIN (Whistle notch shank type)

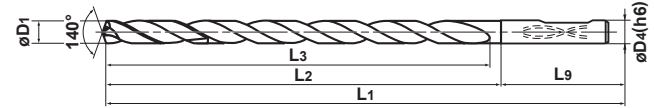

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
10.6	3	□	MNS1060S-DIN	102	57	55	45	12	2
	3	□	1060S-DIN-C	102	57	55	45	12	1
	5	□	1060L-DIN	118	73	71	45	12	2
	5	□	1060L-DIN-C	118	73	71	45	12	1
	8	□	1060-L8C	172	127	123	45	12	1
	10	□	1060-L10C	194	149	145	45	12	1
	12	□	1060-L12C	216	171	167	45	12	1
	15	□	1060-L15C	249	204	200	45	12	1
	20	□	1060-L20C	304	259	255	45	12	1
	25	□	1060-L25C	359	314	310	45	12	1
10.7	5	★	1060LB	149	88	88	61	11	1
	10	□	1060X10DB	207	146	143	61	11	1
	20	□	1060X20DB	317	256	253	61	11	1
	3	□	1070S-DIN	102	57	55	45	12	2
	3	□	1070S-DIN-C	102	57	55	45	12	1
	5	□	1070L-DIN	118	73	71	45	12	2
	5	□	1070L-DIN-C	118	73	71	45	12	1
	8	□	1070-L8C	172	127	123	45	12	1
	10	□	1070-L10C	194	149	145	45	12	1
	12	□	1070-L12C	216	171	167	45	12	1
10.8	15	□	1070-L15C	249	204	200	45	12	1
	20	□	1070-L20C	304	259	255	45	12	1
	25	□	1070-L25C	359	314	310	45	12	1
	5	★	1070LB	149	88	88	61	11	1
	10	□	1070X10DB	207	146	143	61	11	1
	20	□	1070X20DB	317	256	253	61	11	1
	3	□	1080S-DIN	102	57	55	45	12	2
	3	□	1080S-DIN-C	102	57	55	45	12	1
	5	□	1080L-DIN	118	73	71	45	12	2
	5	□	1080L-DIN-C	118	73	71	45	12	1
8	□	1080-L8C	172	127	123	45	12	1	
10	□	1080-L10C	194	149	145	45	12	1	
12	□	1080-L12C	216	171	167	45	12	1	
15	□	1080-L15C	249	204	200	45	12	1	
20	□	1080-L20C	304	259	255	45	12	1	
25	□	1080-L25C	359	314	310	45	12	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
10.8	5	★	MNS1080LB	149	88	88	61	11	1
	10	□	1080X10DB	207	146	143	61	11	1
	20	□	1080X20DB	317	256	253	61	11	1
10.9	3	□	1090S-DIN	102	57	55	45	12	2
	3	□	1090S-DIN-C	102	57	55	45	12	1
	5	□	1090L-DIN	118	73	71	45	12	2
	5	□	1090L-DIN-C	118	73	71	45	12	1
	8	□	1090-L8C	172	127	123	45	12	1
	10	□	1090-L10C	194	149	145	45	12	1
	12	□	1090-L12C	216	171	167	45	12	1
	15	□	1090-L15C	249	204	200	45	12	1
	20	□	1090-L20C	304	259	255	45	12	1
	25	□	1090-L25C	359	314	310	45	12	1
11.0	5	★	1090LB	149	88	88	61	11	1
	10	□	1090X10DB	207	146	143	61	11	1
	20	□	1090X20DB	317	256	253	61	11	1
	3	□	1100S-DIN	102	57	55	45	12	2
	3	□	1100S-DIN-C	102	57	55	45	12	1
	5	□	1100L-DIN	118	73	71	45	12	2
	5	●	1100L-DIN-C	118	73	71	45	12	1
	8	□	1100-L8C	172	127	123	45	12	1
	10	□	1100-L10C	194	149	145	45	12	1
	12	●	1100-L12C	216	171	167	45	12	1
11.1	15	□	1100-L15C	249	204	200	45	12	1
	20	●	1100-L20C	304	259	255	45	12	1
	25	□	1100-L25C	359	314	310	45	12	1
	5	★	1100LB	149	88	88	61	11	1
	10	★	1100X10DB	207	146	143	61	11	1
	20	★	1100X20DB	317	256	253	61	11	1
	3	□	1110S-DIN	102	57	55	45	12	2
	3	□	1110S-DIN-C	102	57	55	45	12	1
	5	□	1110L-DIN	118	73	71	45	12	2
	5	□	1110L-DIN-C	118	73	71	45	12	1
8	□	1110-L8C	178	133	129	45	12	1	
10	□	1110-L10C	201	156	152	45	12	1	
12	□	1110-L12C	224	179	175	45	12	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.

□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
11.1	15	□	MNS1110-L15C	258	213	209	45	12	1
	20	□	1110-L20C	316	271	267	45	12	1
	25	□	1110-L25C	373	328	324	45	12	1
	5	★	1110LB	158	96	92	62	12	1
	10	□	1110X10DB	215	153	150	62	12	1
	20	□	1110X20DB	330	268	265	62	12	1
11.2	3	□	1120S-DIN	102	57	55	45	12	2
	3	□	1120S-DIN-C	102	57	55	45	12	1
	5	□	1120L-DIN	118	73	71	45	12	2
	5	□	1120L-DIN-C	118	73	71	45	12	1
	8	□	1120-L8C	178	133	129	45	12	1
	10	□	1120-L10C	201	156	152	45	12	1
	12	□	1120-L12C	224	179	175	45	12	1
	15	□	1120-L15C	258	213	209	45	12	1
	20	□	1120-L20C	316	271	267	45	12	1
	25	□	1120-L25C	373	328	324	45	12	1
	5	★	1120LB	158	96	92	62	12	1
	10	□	1120X10DB	215	153	150	62	12	1
20	□	1120X20DB	330	268	265	62	12	1	
11.3	3	□	1130S-DIN	102	57	55	45	12	2
	3	□	1130S-DIN-C	102	57	55	45	12	1
	5	□	1130L-DIN	118	73	71	45	12	2
	5	□	1130L-DIN-C	118	73	71	45	12	1
	8	□	1130-L8C	178	133	129	45	12	1
	10	□	1130-L10C	201	156	152	45	12	1
	12	□	1130-L12C	224	179	175	45	12	1
	15	□	1130-L15C	258	213	209	45	12	1
	20	□	1130-L20C	316	271	267	45	12	1
	25	□	1130-L25C	373	328	324	45	12	1
	5	★	1130LB	158	96	92	62	12	1
	10	□	1130X10DB	215	153	150	62	12	1
20	□	1130X20DB	330	268	265	62	12	1	
11.4	3	□	1140S-DIN	102	57	55	45	12	2
	3	□	1140S-DIN-C	102	57	55	45	12	1
	5	□	1140L-DIN	118	73	71	45	12	2
	5	□	1140L-DIN-C	118	73	71	45	12	1
	8	□	1140-L8C	178	133	129	45	12	1
	10	□	1140-L10C	201	156	152	45	12	1
	12	□	1140-L12C	224	179	175	45	12	1
	15	□	1140-L15C	258	213	209	45	12	1
	20	□	1140-L20C	316	271	267	45	12	1
	25	□	1140-L25C	373	328	324	45	12	1
	5	★	1140LB	158	96	92	62	12	1
	10	□	1140X10DB	215	153	150	62	12	1
20	□	1140X20DB	330	268	265	62	12	1	
11.5	3	□	1150S-DIN	102	57	55	45	12	2
	3	□	1150S-DIN-C	102	57	55	45	12	1
	5	□	1150L-DIN	118	73	71	45	12	2
	5	●	1150L-DIN-C	118	73	71	45	12	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
11.5	8	□	MNS1150-L8C	178	133	129	45	12	1
	10	□	1150-L10C	201	156	152	45	12	1
	12	●	1150-L12C	224	179	175	45	12	1
	15	□	1150-L15C	258	213	209	45	12	1
	20	●	1150-L20C	316	271	267	45	12	1
	25	□	1150-L25C	373	328	324	45	12	1
	5	★	1150LB	158	96	92	62	12	1
	10	□	1150X10DB	215	153	150	62	12	1
	20	□	1150X20DB	330	268	265	62	12	1
11.6	3	□	1160S-DIN	102	57	55	45	12	2
	3	□	1160S-DIN-C	102	57	55	45	12	1
	5	□	1160L-DIN	118	73	71	45	12	2
	5	□	1160L-DIN-C	118	73	71	45	12	1
	8	□	1160-L8C	183	138	134	45	12	1
	10	□	1160-L10C	207	162	158	45	12	1
	12	□	1160-L12C	231	186	182	45	12	1
	15	□	1160-L15C	267	222	218	45	12	1
	20	□	1160-L20C	327	282	278	45	12	1
	25	□	1160-L25C	387	342	338	45	12	1
	5	★	1160LB	158	96	96	62	12	1
	10	□	1160X10DB	221	159	156	62	12	1
20	□	1160X20DB	341	279	276	62	12	1	
11.7	3	□	1170S-DIN	102	57	55	45	12	2
	3	□	1170S-DIN-C	102	57	55	45	12	1
	5	□	1170L-DIN	118	73	71	45	12	2
	5	□	1170L-DIN-C	118	73	71	45	12	1
	8	□	1170-L8C	183	138	134	45	12	1
	10	□	1170-L10C	207	162	158	45	12	1
	12	□	1170-L12C	231	186	182	45	12	1
	15	□	1170-L15C	267	222	218	45	12	1
	20	□	1170-L20C	327	282	278	45	12	1
	25	□	1170-L25C	387	342	338	45	12	1
	5	★	1170LB	158	96	96	62	12	1
	10	□	1170X10DB	221	159	156	62	12	1
20	□	1170X20DB	341	279	276	62	12	1	
11.8	3	□	1180S-DIN	102	57	55	45	12	2
	3	□	1180S-DIN-C	102	57	55	45	12	1
	5	□	1180L-DIN	118	73	71	45	12	2
	5	□	1180L-DIN-C	118	73	71	45	12	1
	8	□	1180-L8C	183	138	134	45	12	1
	10	□	1180-L10C	207	162	158	45	12	1
	12	□	1180-L12C	231	186	182	45	12	1
	15	□	1180-L15C	267	222	218	45	12	1
	20	□	1180-L20C	327	282	278	45	12	1
	25	□	1180-L25C	387	342	338	45	12	1
	5	★	1180LB	158	96	96	62	12	1
	10	□	1180X10DB	221	159	156	62	12	1
20	□	1180X20DB	341	279	276	62	12	1	



DRILLING (SOLID CARBIDE)

MNS NEW




Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	0 -0.032
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

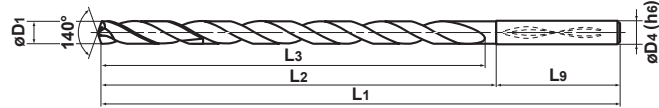

● **Type 2** MNS----S/L-DIN (Whistle notch shank type)

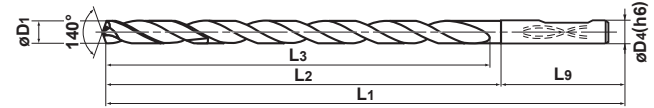

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
11.9	3	□	MNS1190S-DIN	102	57	55	45	12	2
	3	□	1190S-DIN-C	102	57	55	45	12	1
	5	□	1190L-DIN	118	73	71	45	12	2
	5	□	1190L-DIN-C	118	73	71	45	12	1
	8	□	1190-L8C	183	138	134	45	12	1
	10	□	1190-L10C	207	162	158	45	12	1
	12	□	1190-L12C	231	186	182	45	12	1
	15	□	1190-L15C	267	222	218	45	12	1
	20	□	1190-L20C	327	282	278	45	12	1
	25	□	1190-L25C	387	342	338	45	12	1
12.0	5	★	1190LB	158	96	96	62	12	1
	10	□	1190X10DB	221	159	156	62	12	1
	20	□	1190X20DB	341	279	276	62	12	1
	3	□	1200S-DIN	102	57	55	45	12	2
	3	□	1200S-DIN-C	102	57	55	45	12	1
	5	□	1200L-DIN	118	73	71	45	12	2
	5	●	1200L-DIN-C	118	73	71	45	12	1
	8	□	1200-L8C	183	138	134	45	12	1
	10	□	1200-L10C	207	162	158	45	12	1
	12	●	1200-L12C	231	186	182	45	12	1
12.1	15	□	1200-L15C	267	222	218	45	12	1
	20	●	1200-L20C	327	282	278	45	12	1
	25	□	1200-L25C	387	342	338	45	12	1
	5	★	1200LB	158	96	96	62	12	1
	10	★	1200X10DB	221	159	156	62	12	1
	20	★	1200X20DB	341	279	276	62	12	1
	3	□	1210S-DIN	107	62	60	45	14	2
	3	□	1210S-DIN-C	107	62	60	45	14	1
	5	□	1210L-DIN	124	79	77	45	14	2
	5	□	1210L-DIN-C	124	79	77	45	14	1
8	□	1210-L8C	189	144	140	45	14	1	
10	□	1210-L10C	214	169	165	45	14	1	
12	□	1210-L12C	239	194	190	45	14	1	
15	□	1210-L15C	276	231	227	45	14	1	
20	□	1210-L20C	339	294	290	45	14	1	
5	★	1210LB	167	104	100	63	13	1	
10	□	1210X10DB	229	166	163	63	13	1	
20	□	1210X20DB	354	291	288	63	13	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
12.2	3	□	MNS1220S-DIN	107	62	60	45	14	2
	3	□	1220S-DIN-C	107	62	60	45	14	1
	5	□	1220L-DIN	124	79	77	45	14	2
	5	□	1220L-DIN-C	124	79	77	45	14	1
	8	□	1220-L8C	189	144	140	45	14	1
	10	□	1220-L10C	214	169	165	45	14	1
	12	□	1220-L12C	239	194	190	45	14	1
	15	□	1220-L15C	276	231	227	45	14	1
	20	□	1220-L20C	339	294	290	45	14	1
	5	★	1220LB	167	104	100	63	13	1
12.3	10	□	1220X10DB	229	166	163	63	13	1
	20	□	1220X20DB	354	291	288	63	13	1
	3	□	1230S-DIN	107	62	60	45	14	2
	3	□	1230S-DIN-C	107	62	60	45	14	1
	5	□	1230L-DIN	124	79	77	45	14	2
	5	□	1230L-DIN-C	124	79	77	45	14	1
	8	□	1230-L8C	189	144	140	45	14	1
	10	□	1230-L10C	214	169	165	45	14	1
	12	□	1230-L12C	239	194	190	45	14	1
	15	□	1230-L15C	276	231	227	45	14	1
12.4	20	□	1230-L20C	339	294	290	45	14	1
	5	★	1230LB	167	104	100	63	13	1
	10	□	1230X10DB	229	166	163	63	13	1
	20	□	1230X20DB	354	291	288	63	13	1
	3	□	1240S-DIN	107	62	60	45	14	2
	3	□	1240S-DIN-C	107	62	60	45	14	1
	5	□	1240L-DIN	124	79	77	45	14	2
	5	□	1240L-DIN-C	124	79	77	45	14	1
	8	□	1240-L8C	189	144	140	45	14	1
	10	□	1240-L10C	214	169	165	45	14	1
12	□	1240-L12C	239	194	190	45	14	1	
15	□	1240-L15C	276	231	227	45	14	1	
20	□	1240-L20C	339	294	290	45	14	1	
5	★	1240LB	167	104	100	63	13	1	
10	□	1240X10DB	229	166	163	63	13	1	
20	□	1240X20DB	354	291	288	63	13	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.
□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
12.5	3	□	MNS1250S-DIN	107	62	60	45	14	2
	3	□	1250S-DIN-C	107	62	60	45	14	1
	5	□	1250L-DIN	124	79	77	45	14	2
	5	●	1250L-DIN-C	124	79	77	45	14	1
	8	□	1250-L8C	189	144	140	45	14	1
	10	□	1250-L10C	214	169	165	45	14	1
	12	●	1250-L12C	239	194	190	45	14	1
	15	□	1250-L15C	276	231	227	45	14	1
	20	●	1250-L20C	339	294	290	45	14	1
	5	★	1250LB	167	104	100	63	13	1
	10	□	1250X10DB	229	166	163	63	13	1
20	□	1250X20DB	354	291	288	63	13	1	
12.6	3	□	1260S-DIN	107	62	60	45	14	2
	3	□	1260S-DIN-C	107	62	60	45	14	1
	5	□	1260L-DIN	124	79	77	45	14	2
	5	□	1260L-DIN-C	124	79	77	45	14	1
	8	□	1260-L8C	194	149	145	45	14	1
	10	□	1260-L10C	220	175	171	45	14	1
	12	□	1260-L12C	246	201	197	45	14	1
	15	□	1260-L15C	285	240	236	45	14	1
	20	□	1260-L20C	350	305	301	45	14	1
	5	★	1260LB	167	104	104	63	13	1
	10	□	1260X10DB	235	172	169	63	13	1
20	□	1260X20DB	365	302	299	63	13	1	
12.7	3	□	1270S-DIN	107	62	60	45	14	2
	3	□	1270S-DIN-C	107	62	60	45	14	1
	5	□	1270L-DIN	124	79	77	45	14	2
	5	□	1270L-DIN-C	124	79	77	45	14	1
	8	□	1270-L8C	194	149	145	45	14	1
	10	□	1270-L10C	220	175	171	45	14	1
	12	□	1270-L12C	246	201	197	45	14	1
	15	□	1270-L15C	285	240	236	45	14	1
	20	□	1270-L20C	350	305	301	45	14	1
	5	★	1270LB	167	104	104	63	13	1
	10	□	1270X10DB	235	172	169	63	13	1
20	□	1270X20DB	365	302	299	63	13	1	
12.8	3	□	1280S-DIN	107	62	60	45	14	2
	3	□	1280S-DIN-C	107	62	60	45	14	1
	5	□	1280L-DIN	124	79	77	45	14	2
	5	□	1280L-DIN-C	124	79	77	45	14	1
	8	□	1280-L8C	194	149	145	45	14	1
	10	□	1280-L10C	220	175	171	45	14	1
	12	□	1280-L12C	246	201	197	45	14	1
	15	□	1280-L15C	285	240	236	45	14	1
	20	□	1280-L20C	350	305	301	45	14	1
	5	★	1280LB	167	104	104	63	13	1
	10	□	1280X10DB	235	172	169	63	13	1
20	□	1280X20DB	365	302	299	63	13	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
12.9	3	□	MNS1290S-DIN	107	62	60	45	14	2
	3	□	1290S-DIN-C	107	62	60	45	14	1
	5	□	1290L-DIN	124	79	77	45	14	2
	5	□	1290L-DIN-C	124	79	77	45	14	1
	8	□	1290-L8C	194	149	145	45	14	1
	10	□	1290-L10C	220	175	171	45	14	1
	12	□	1290-L12C	246	201	197	45	14	1
	15	□	1290-L15C	285	240	236	45	14	1
	20	□	1290-L20C	350	305	301	45	14	1
	5	★	1290LB	167	104	104	63	13	1
	10	□	1290X10DB	235	172	169	63	13	1
20	□	1290X20DB	365	302	299	63	13	1	
13.0	3	□	1300S-DIN	107	62	60	45	14	2
	3	□	1300S-DIN-C	107	62	60	45	14	1
	5	□	1300L-DIN	124	79	77	45	14	2
	5	●	1300L-DIN-C	124	79	77	45	14	1
	8	□	1300-L8C	194	149	145	45	14	1
	10	□	1300-L10C	220	175	171	45	14	1
	12	●	1300-L12C	246	201	197	45	14	1
	15	□	1300-L15C	285	240	236	45	14	1
	20	●	1300-L20C	350	305	301	45	14	1
	5	★	1300LB	167	104	104	63	13	1
	10	★	1300X10DB	235	172	169	63	13	1
20	★	1300X20DB	365	302	299	63	13	1	
13.1	3	□	1310S-DIN	107	62	60	45	14	2
	3	□	1310S-DIN-C	107	62	60	45	14	1
	5	□	1310L-DIN	124	79	77	45	14	2
	5	□	1310L-DIN-C	124	79	77	45	14	1
	8	□	1310-L8C	200	155	151	45	14	1
	10	□	1310-L10C	227	182	178	45	14	1
	12	□	1310-L12C	254	209	205	45	14	1
	15	□	1310-L15C	294	249	245	45	14	1
	20	□	1310-L20C	362	317	313	45	14	1
	5	★	1310LB	176	112	108	64	14	1
	10	□	1310X10DB	243	179	176	64	14	1
20	□	1310X20DB	378	314	311	64	14	1	
13.2	3	□	1320S-DIN	107	62	60	45	14	2
	3	□	1320S-DIN-C	107	62	60	45	14	1
	5	□	1320L-DIN	124	79	77	45	14	2
	5	□	1320L-DIN-C	124	79	77	45	14	1
	8	□	1320-L8C	200	155	151	45	14	1
	10	□	1320-L10C	227	182	178	45	14	1
	12	□	1320-L12C	254	209	205	45	14	1
	15	□	1320-L15C	294	249	245	45	14	1
	20	□	1320-L20C	362	317	313	45	14	1
	5	★	1320LB	176	112	108	64	14	1
	10	□	1320X10DB	243	179	176	64	14	1
20	□	1320X20DB	378	314	311	64	14	1	



DRILLING (SOLID CARBIDE)

MNS NEW




CARBIDE

Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

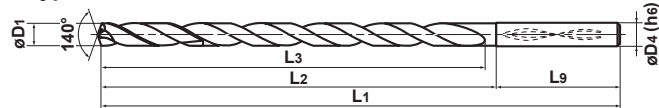

● **Type 2** MNS----S/L-DIN (Whistle notch shank type)

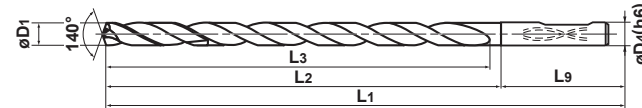

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
13.3	3	□	MNS1330S-DIN	107	62	60	45	14	2
	3	□	1330S-DIN-C	107	62	60	45	14	1
	5	□	1330L-DIN	124	79	77	45	14	2
	5	□	1330L-DIN-C	124	79	77	45	14	1
	8	□	1330-L8C	200	155	151	45	14	1
	10	□	1330-L10C	227	182	178	45	14	1
	12	□	1330-L12C	254	209	205	45	14	1
	15	□	1330-L15C	294	249	245	45	14	1
	20	□	1330-L20C	362	317	313	45	14	1
	5	★	1330LB	176	112	108	64	14	1
10	□	1330X10DB	243	179	176	64	14	1	
20	□	1330X20DB	378	314	311	64	14	1	
13.4	3	□	1340S-DIN	107	62	60	45	14	2
	3	□	1340S-DIN-C	107	62	60	45	14	1
	5	□	1340L-DIN	124	79	77	45	14	2
	5	□	1340L-DIN-C	124	79	77	45	14	1
	8	□	1340-L8C	200	155	151	45	14	1
	10	□	1340-L10C	227	182	178	45	14	1
	12	□	1340-L12C	254	209	205	45	14	1
	15	□	1340-L15C	294	249	245	45	14	1
	20	□	1340-L20C	362	317	313	45	14	1
	5	★	1340LB	176	112	108	64	14	1
10	□	1340X10DB	243	179	176	64	14	1	
20	□	1340X20DB	378	314	311	64	14	1	
13.5	3	□	1350S-DIN	107	62	60	45	14	2
	3	□	1350S-DIN-C	107	62	60	45	14	1
	5	□	1350L-DIN	124	79	77	45	14	2
	5	●	1350L-DIN-C	124	79	77	45	14	1
	8	□	1350-L8C	200	155	151	45	14	1
	10	□	1350-L10C	227	182	178	45	14	1
	12	●	1350-L12C	254	209	205	45	14	1
	15	□	1350-L15C	294	249	245	45	14	1
	20	●	1350-L20C	362	317	313	45	14	1
	5	★	1350LB	176	112	108	64	14	1
10	□	1350X10DB	243	179	176	64	14	1	
20	□	1350X20DB	378	314	311	64	14	1	

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
13.6	3	□	MNS1360S-DIN	107	62	60	45	14	2
	3	□	1360S-DIN-C	107	62	60	45	14	1
	5	□	1360L-DIN	124	79	77	45	14	2
	5	□	1360L-DIN-C	124	79	77	45	14	1
	8	□	1360-L8C	205	160	156	45	14	1
	10	□	1360-L10C	233	188	184	45	14	1
	12	□	1360-L12C	261	216	212	45	14	1
	15	□	1360-L15C	303	258	254	45	14	1
	20	□	1360-L20C	373	328	324	45	14	1
	5	★	1360LB	176	112	112	64	14	1
10	□	1360X10DB	249	185	182	64	14	1	
20	□	1360X20DB	389	325	322	64	14	1	
13.7	3	□	1370S-DIN	107	62	60	45	14	2
	3	□	1370S-DIN-C	107	62	60	45	14	1
	5	□	1370L-DIN	124	79	77	45	14	2
	5	□	1370L-DIN-C	124	79	77	45	14	1
	8	□	1370-L8C	205	160	156	45	14	1
	10	□	1370-L10C	233	188	184	45	14	1
	12	□	1370-L12C	261	216	212	45	14	1
	15	□	1370-L15C	303	258	254	45	14	1
	20	□	1370-L20C	373	328	324	45	14	1
	5	★	1370LB	176	112	112	64	14	1
10	□	1370X10DB	249	185	182	64	14	1	
20	□	1370X20DB	389	325	322	64	14	1	
13.8	3	□	1380S-DIN	107	62	60	45	14	2
	3	□	1380S-DIN-C	107	62	60	45	14	1
	5	□	1380L-DIN	124	79	77	45	14	2
	5	□	1380L-DIN-C	124	79	77	45	14	1
	8	□	1380-L8C	205	160	156	45	14	1
	10	□	1380-L10C	233	188	184	45	14	1
	12	□	1380-L12C	261	216	212	45	14	1
	15	□	1380-L15C	303	258	254	45	14	1
	20	□	1380-L20C	373	328	324	45	14	1
	5	★	1380LB	176	112	112	64	14	1
10	□	1380X10DB	249	185	182	64	14	1	
20	□	1380X20DB	389	325	322	64	14	1	

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. ★ : Inventory maintained in Japan.

□ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
13.9	3	□	MNS1390S-DIN	107	62	60	45	14	2
	3	□	1390S-DIN-C	107	62	60	45	14	1
	5	□	1390L-DIN	124	79	77	45	14	2
	5	□	1390L-DIN-C	124	79	77	45	14	1
	8	□	1390-L8C	205	160	156	45	14	1
	10	□	1390-L10C	233	188	184	45	14	1
	12	□	1390-L12C	261	216	212	45	14	1
	15	□	1390-L15C	303	258	254	45	14	1
	20	□	1390-L20C	373	328	324	45	14	1
	5	★	1390LB	176	112	112	64	14	1
	10	□	1390X10DB	249	185	182	64	14	1
	20	□	1390X20DB	389	325	322	64	14	1
14.0	3	□	1400S-DIN	107	62	60	45	14	2
	3	□	1400S-DIN-C	107	62	60	45	14	1
	5	□	1400L-DIN	124	79	77	45	14	2
	5	●	1400L-DIN-C	124	79	77	45	14	1
	8	□	1400-L8C	205	160	156	45	14	1
	10	□	1400-L10C	233	188	184	45	14	1
	12	●	1400-L12C	261	216	212	45	14	1
	15	□	1400-L15C	303	258	254	45	14	1
	20	●	1400-L20C	373	328	324	45	14	1
	5	★	1400LB	176	112	112	64	14	1
	10	★	1400X10DB	249	185	182	64	14	1
	20	★	1400X20DB	389	325	322	64	14	1
14.1	3	□	1410S-DIN	114	66	64	48	16	2
	3	□	1410S-DIN-C	114	66	64	48	16	1
	5	□	1410L-DIN	132	84	82	48	16	2
	5	□	1410L-DIN-C	132	84	82	48	16	1
14.2	3	□	1420S-DIN	114	66	64	48	16	2
	3	□	1420S-DIN-C	114	66	64	48	16	1
	5	□	1420L-DIN	132	84	82	48	16	2
	5	●	1420L-DIN-C	132	84	82	48	16	1
14.3	3	□	1430S-DIN	114	66	64	48	16	2
	3	□	1430S-DIN-C	114	66	64	48	16	1
	5	□	1430L-DIN	132	84	82	48	16	2
	5	□	1430L-DIN-C	132	84	82	48	16	1
14.4	3	□	1440S-DIN	114	66	64	48	16	2
	3	□	1440S-DIN-C	114	66	64	48	16	1
	5	□	1440L-DIN	132	84	82	48	16	2
	5	□	1440L-DIN-C	132	84	82	48	16	1
14.5	3	□	1450S-DIN	114	66	64	48	16	2
	3	□	1450S-DIN-C	114	66	64	48	16	1
	5	□	1450L-DIN	132	84	82	48	16	2
	5	●	1450L-DIN-C	132	84	82	48	16	1
14.6	3	□	1460S-DIN	114	66	64	48	16	2
	3	□	1460S-DIN-C	114	66	64	48	16	1
	5	□	1460L-DIN	132	84	82	48	16	2
	5	□	1460L-DIN-C	132	84	82	48	16	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
14.7	3	□	MNS1470S-DIN	114	66	64	48	16	2
	3	□	1470S-DIN-C	114	66	64	48	16	1
	5	□	1470L-DIN	132	84	82	48	16	2
	5	□	1470L-DIN-C	132	84	82	48	16	1
14.8	3	□	1480S-DIN	114	66	64	48	16	2
	3	□	1480S-DIN-C	114	66	64	48	16	1
	5	□	1480L-DIN	132	84	82	48	16	2
	5	□	1480L-DIN-C	132	84	82	48	16	1
14.9	3	□	1490S-DIN	114	66	64	48	16	2
	3	□	1490S-DIN-C	114	66	64	48	16	1
	5	□	1490L-DIN	132	84	82	48	16	2
	5	□	1490L-DIN-C	132	84	82	48	16	1
15.0	3	□	1500S-DIN	114	66	64	48	16	2
	3	□	1500S-DIN-C	114	66	64	48	16	1
	5	□	1500L-DIN	132	84	82	48	16	2
	5	●	1500L-DIN-C	132	84	82	48	16	1
15.1	3	□	1510S-DIN	115	67	65	48	16	2
	3	□	1510S-DIN-C	115	67	65	48	16	1
	5	□	1510L-DIN	133	85	83	48	16	2
	5	□	1510L-DIN-C	133	85	83	48	16	1
15.2	3	□	1520S-DIN	115	67	65	48	16	2
	3	□	1520S-DIN-C	115	67	65	48	16	1
	5	□	1520L-DIN	133	85	83	48	16	2
	5	□	1520L-DIN-C	133	85	83	48	16	1
15.3	3	□	1530S-DIN	115	67	65	48	16	2
	3	□	1530S-DIN-C	115	67	65	48	16	1
	5	□	1530L-DIN	133	85	83	48	16	2
	5	□	1530L-DIN-C	133	85	83	48	16	1
15.4	3	□	1540S-DIN	115	67	65	48	16	2
	3	□	1540S-DIN-C	115	67	65	48	16	1
	5	□	1540L-DIN	133	85	83	48	16	2
	5	□	1540L-DIN-C	133	85	83	48	16	1
15.5	3	□	1550S-DIN	115	67	65	48	16	2
	3	□	1550S-DIN-C	115	67	65	48	16	1
	5	□	1550L-DIN	133	85	83	48	16	2
	5	●	1550L-DIN-C	133	85	83	48	16	1
15.6	3	□	1560S-DIN	115	67	65	48	16	2
	3	□	1560S-DIN-C	115	67	65	48	16	1
	5	□	1560L-DIN	133	85	83	48	16	2
	5	□	1560L-DIN-C	133	85	83	48	16	1
15.7	3	□	1570S-DIN	115	67	65	48	16	2
	3	□	1570S-DIN-C	115	67	65	48	16	1
	5	□	1570L-DIN	133	85	83	48	16	2
	5	□	1570L-DIN-C	133	85	83	48	16	1
15.8	3	□	1580S-DIN	115	67	65	48	16	2
	3	□	1580S-DIN-C	115	67	65	48	16	1
	5	□	1580L-DIN	133	85	83	48	16	2
	5	□	1580L-DIN-C	133	85	83	48	16	1

DRILLING SOLID CARBIDE



DRILLING (SOLID CARBIDE)

MNS NEW




CARBIDE

Carbon Steel Alloy Steel	Hardened Steel	Stainless Steel	Cast Iron	Light Alloy	Heat Resistant Alloy
				++	


		D1=3	3<D1≤6	6<D1≤10	10<D1≤18	18<D1≤20
D1 Tolerance (mm)	DIN type	+0.016 +0.004	+0.016 +0.004	+0.021 +0.006	+0.025 +0.007	+0.029 +0.008
	Others	0 -0.014	0 -0.018	0 -0.022	0 -0.027	
D4 Tolerance (mm)		0 -0.006	0 -0.008	0 -0.009	0 -0.011	0 -0.013



● **Type 1** MNS----DIN-C, MNS-C, MNS----LB, MNS----DB (Cylindrical shank type)

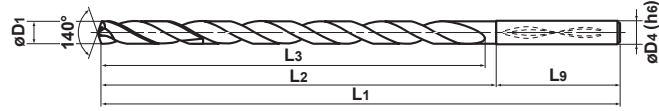

● **Type 2** MNS----S/L-DIN (Whistle notch shank type)

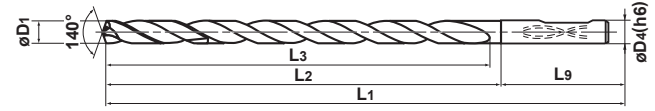

(Note) MNS drills are suitable for use with shrink fit holders.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
15.9	3	<input type="checkbox"/>	MNS1590S-DIN	115	67	65	48	16	2
	3	<input type="checkbox"/>	1590S-DIN-C	115	67	65	48	16	1
	5	<input type="checkbox"/>	1590L-DIN	133	85	83	48	16	2
	5	<input type="checkbox"/>	1590L-DIN-C	133	85	83	48	16	1
16.0	3	<input type="checkbox"/>	1600S-DIN	115	67	65	48	16	2
	3	<input type="checkbox"/>	1600S-DIN-C	115	67	65	48	16	1
	5	<input type="checkbox"/>	1600L-DIN	133	85	83	48	16	2
	5	<input checked="" type="checkbox"/>	1600L-DIN-C	133	85	83	48	16	1
16.1	3	<input type="checkbox"/>	1610S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1610S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1610L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1610L-DIN-C	143	95	93	48	18	1
16.2	3	<input type="checkbox"/>	1620S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1620S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1620L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1620L-DIN-C	143	95	93	48	18	1
16.3	3	<input type="checkbox"/>	1630S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1630S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1630L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1630L-DIN-C	143	95	93	48	18	1
16.4	3	<input type="checkbox"/>	1640S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1640S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1640L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1640L-DIN-C	143	95	93	48	18	1
16.5	3	<input type="checkbox"/>	1650S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1650S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1650L-DIN	143	95	93	48	18	2
	5	<input checked="" type="checkbox"/>	1650L-DIN-C	143	95	93	48	18	1
16.6	3	<input type="checkbox"/>	1660S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1660S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1660L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1660L-DIN-C	143	95	93	48	18	1
16.7	3	<input type="checkbox"/>	1670S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1670S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1670L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1670L-DIN-C	143	95	93	48	18	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
16.8	3	<input type="checkbox"/>	MNS1680S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1680S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1680L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1680L-DIN-C	143	95	93	48	18	1
16.9	3	<input type="checkbox"/>	1690S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1690S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1690L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1690L-DIN-C	143	95	93	48	18	1
17.0	3	<input type="checkbox"/>	1700S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1700S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1700L-DIN	143	95	93	48	18	2
	5	<input checked="" type="checkbox"/>	1700L-DIN-C	143	95	93	48	18	1
17.1	3	<input type="checkbox"/>	1710S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1710S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1710L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1710L-DIN-C	143	95	93	48	18	1
17.2	3	<input type="checkbox"/>	1720S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1720S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1720L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1720L-DIN-C	143	95	93	48	18	1
17.3	3	<input type="checkbox"/>	1730S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1730S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1730L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1730L-DIN-C	143	95	93	48	18	1
17.4	3	<input type="checkbox"/>	1740S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1740S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1740L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1740L-DIN-C	143	95	93	48	18	1
17.5	3	<input type="checkbox"/>	1750S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1750S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1750L-DIN	143	95	93	48	18	2
	5	<input checked="" type="checkbox"/>	1750L-DIN-C	143	95	93	48	18	1
17.6	3	<input type="checkbox"/>	1760S-DIN	123	75	73	48	18	2
	3	<input type="checkbox"/>	1760S-DIN-C	123	75	73	48	18	1
	5	<input type="checkbox"/>	1760L-DIN	143	95	93	48	18	2
	5	<input type="checkbox"/>	1760L-DIN-C	143	95	93	48	18	1

(Note) Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).

● : Inventory maintained. □ : Non stock, produced to order only.

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
17.7	3	□	MNS1770S-DIN	123	75	73	48	18	2
	3	□	1770S-DIN-C	123	75	73	48	18	1
	5	□	1770L-DIN	143	95	93	48	18	2
	5	□	1770L-DIN-C	143	95	93	48	18	1
17.8	3	□	1780S-DIN	123	75	73	48	18	2
	3	□	1780S-DIN-C	123	75	73	48	18	1
	5	□	1780L-DIN	143	95	93	48	18	2
	5	□	1780L-DIN-C	143	95	93	48	18	1
17.9	3	□	1790S-DIN	123	75	73	48	18	2
	3	□	1790S-DIN-C	123	75	73	48	18	1
	5	□	1790L-DIN	143	95	93	48	18	2
	5	□	1790L-DIN-C	143	95	93	48	18	1
18.0	3	□	1800S-DIN	123	75	73	48	18	2
	3	□	1800S-DIN-C	123	75	73	48	18	1
	5	□	1800L-DIN	143	95	93	48	18	2
	5	●	1800L-DIN-C	143	95	93	48	18	1
18.1	3	□	1810S-DIN	131	81	79	50	20	2
	3	□	1810S-DIN-C	131	81	79	50	20	1
	5	□	1810L-DIN	153	103	101	50	20	2
	5	□	1810L-DIN-C	153	103	101	50	20	1
18.2	3	□	1820S-DIN	131	81	79	50	20	2
	3	□	1820S-DIN-C	131	81	79	50	20	1
	5	□	1820L-DIN	153	103	101	50	20	2
	5	□	1820L-DIN-C	153	103	101	50	20	1
18.3	3	□	1830S-DIN	131	81	79	50	20	2
	3	□	1830S-DIN-C	131	81	79	50	20	1
	5	□	1830L-DIN	153	103	101	50	20	2
	5	□	1830L-DIN-C	153	103	101	50	20	1
18.4	3	□	1840S-DIN	131	81	79	50	20	2
	3	□	1840S-DIN-C	131	81	79	50	20	1
	5	□	1840L-DIN	153	103	101	50	20	2
	5	□	1840L-DIN-C	153	103	101	50	20	1
18.5	3	□	1850S-DIN	131	81	79	50	20	2
	3	□	1850S-DIN-C	131	81	79	50	20	1
	5	□	1850L-DIN	153	103	101	50	20	2
	5	●	1850L-DIN-C	153	103	101	50	20	1
18.6	3	□	1860S-DIN	131	81	79	50	20	2
	3	□	1860S-DIN-C	131	81	79	50	20	1
	5	□	1860L-DIN	153	103	101	50	20	2
	5	□	1860L-DIN-C	153	103	101	50	20	1
18.7	3	□	1870S-DIN	131	81	79	50	20	2
	3	□	1870S-DIN-C	131	81	79	50	20	1
	5	□	1870L-DIN	153	103	101	50	20	2
	5	□	1870L-DIN-C	153	103	101	50	20	1
18.8	3	□	1880S-DIN	131	81	79	50	20	2
	3	□	1880S-DIN-C	131	81	79	50	20	1
	5	□	1880L-DIN	153	103	101	50	20	2
	5	□	1880L-DIN-C	153	103	101	50	20	1

Drill Dia. D1 (mm)	Hole Depth (l/d)	Stock TF15	Order Number	Dimensions (mm)					Type
				L1	L2	L3	L9	D4	
18.9	3	□	MNS1890S-DIN	131	81	79	50	20	2
	3	□	1890S-DIN-C	131	81	79	50	20	1
	5	□	1890L-DIN	153	103	101	50	20	2
	5	□	1890L-DIN-C	153	103	101	50	20	1
19.0	3	□	1900S-DIN	131	81	79	50	20	2
	3	□	1900S-DIN-C	131	81	79	50	20	1
	5	□	1900L-DIN	153	103	101	50	20	2
	5	□	1900L-DIN-C	153	103	101	50	20	1
19.1	3	□	1910S-DIN	131	81	79	50	20	2
	3	□	1910S-DIN-C	131	81	79	50	20	1
	5	□	1910L-DIN	153	103	101	50	20	2
	5	□	1910L-DIN-C	153	103	101	50	20	1
19.2	3	□	1920S-DIN	131	81	79	50	20	2
	3	□	1920S-DIN-C	131	81	79	50	20	1
	5	□	1920L-DIN	153	103	101	50	20	2
	5	□	1920L-DIN-C	153	103	101	50	20	1
19.3	3	□	1930S-DIN	131	81	79	50	20	2
	3	□	1930S-DIN-C	131	81	79	50	20	1
	5	□	1930L-DIN	153	103	101	50	20	2
	5	□	1930L-DIN-C	153	103	101	50	20	1
19.4	3	□	1940S-DIN	131	81	79	50	20	2
	3	□	1940S-DIN-C	131	81	79	50	20	1
	5	□	1940L-DIN	153	103	101	50	20	2
	5	□	1940L-DIN-C	153	103	101	50	20	1
19.5	3	□	1950S-DIN	131	81	79	50	20	2
	3	□	1950S-DIN-C	131	81	79	50	20	1
	5	□	1950L-DIN	153	103	101	50	20	2
	5	●	1950L-DIN-C	153	103	101	50	20	1
19.6	3	□	1960S-DIN	131	81	79	50	20	2
	3	□	1960S-DIN-C	131	81	79	50	20	1
	5	□	1960L-DIN	153	103	101	50	20	2
	5	□	1960L-DIN-C	153	103	101	50	20	1
19.7	3	□	1970S-DIN	131	81	79	50	20	2
	3	□	1970S-DIN-C	131	81	79	50	20	1
	5	□	1970L-DIN	153	103	101	50	20	2
	5	□	1970L-DIN-C	153	103	101	50	20	1
19.8	3	□	1980S-DIN	131	81	79	50	20	2
	3	□	1980S-DIN-C	131	81	79	50	20	1
	5	□	1980L-DIN	153	103	101	50	20	2
	5	□	1980L-DIN-C	153	103	101	50	20	1
19.9	3	□	1990S-DIN	131	81	79	50	20	2
	3	□	1990S-DIN-C	131	81	79	50	20	1
	5	□	1990L-DIN	153	103	101	50	20	2
	5	□	1990L-DIN-C	153	103	101	50	20	1
20.0	3	□	2000S-DIN	131	81	79	50	20	2
	3	□	2000S-DIN-C	131	81	79	50	20	1
	5	□	2000L-DIN	153	103	101	50	20	2
	5	●	2000L-DIN-C	153	103	101	50	20	1







RECOMMENDED CUTTING CONDITIONS




Work Material	Drill Type	Drill Diameter							
		φ3.0—φ6.0		φ6.1—φ10.0		φ10.1—φ14.0		φ14.1—φ20.0	
		Cutting Speed (m/min)	Feed (mm/rev)	Cutting Speed (m/min)	Feed (mm/rev)	Cutting Speed (m/min)	Feed (mm/rev)	Cutting Speed (m/min)	Feed (mm/rev)
N Aluminium Alloy Casting	L/D 3, 5, 8	80—150	0.20—0.50	100—200	0.30—1.00	150—250	0.30—1.00	150—250	0.30—1.00
	Aluminium Die Casting	L/D 10—30	60—120	0.20—0.50	80—150	0.30—1.00	120—200	0.30—1.00	—
Wrought Aluminium Alloy	L/D 3, 5, 8	80—150	0.15—0.30	100—200	0.20—0.40	150—250	0.20—0.40	150—250	0.30—1.00
	L/D 10—30	60—120	0.15—0.30	80—150	0.20—0.40	120—200	0.20—0.40	—	—

(Note 1) When using the drill with a length over L/d 10, it is necessary to use a prep hole as a guide. (If no prep-hole is used then drill breakage can occur)


(Note 2) For pilot hole drilling, Mitsubishi Materials MNS, MAE-MB or MAS-MB drill is recommended.

OPERATIONAL GUIDANCE FOR THE MNS DRILL (L/D 3, 5, 8)

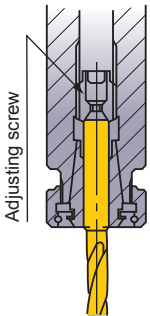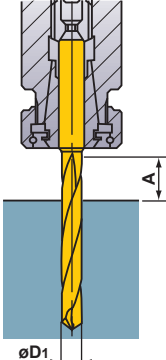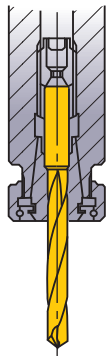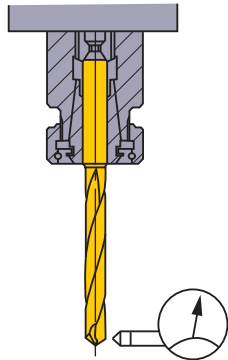Drill holding  Thrust bearing type collet chuck holds the drill securely.	Drill length  $A : \geq D1 \times 1.5$	Drill installation  Do not clamp on the flutes.	Installation tolerance  Runout $\leq 0.03\text{mm}$
--	---	---	--

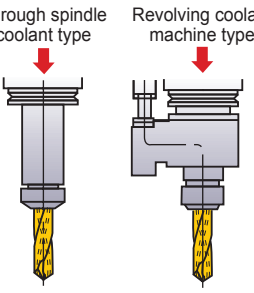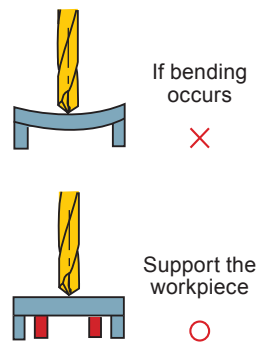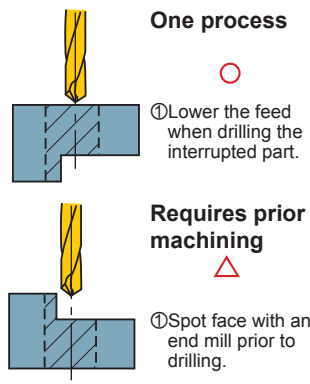Coolant method (MNS)  Coolant pressure is approx. 0.5 - 7MPa.	Coolant handling < MNS type > 1) Dirt and dust particles in old coolant can clog the oil hole and prevent effective flow. Regular coolant exchange is recommended. 2) Small particles of swarf will jam in the oil hole. Use a filter as a preventative measure. When using small diameter drills, use a fine mesh filter.	Thin workpieces  If bending occurs Support the workpiece	Interrupted cutting  One process ① Lower the feed when drilling the interrupted part. Requires prior machining ① Spot face with an end mill prior to drilling.
---	--	--	---


Stepped holes



- ① Divide the machining into two processes.
- ② Drill the larger hole first.

*Tools for chamfering and spot facing can be produced to order.

Burring and workpiece chipping




- ① Lower the feed rate when breaking through.
- ② Add a chamfer.
- ③ Change the point angle.

OPERATIONAL GUIDANCE FOR THE MNS TYPE LONG DRILL (L/D 10, 12, 15, 20, 25, 30)

FLAT FACE DRILLING


● Drilling a blind hole

1. Drilling a pilot hole



- ① Use a drill with a larger (flatter) point angle than the super long type. Mitsubishi type MNS, MAE-MB or MAS-MB drill is recommended.
- ② Ensure a high precision hole is drilled for the guide.
- ③ Drill depth : Approx 1D or deeper.
(Adjust the pilot hole depth according to the length of the super long type.)

2. Initial cutting with the long type drill




- ① Penetrate the pilot hole at low revolution. (Cutting speed 20m-30m/min, feed rate 0.2mm-0.3mm/rev)
- ② Stop the long type drill 1mm-3mm short of the pilot hole bottom.

3. Drill the deep hole



- ① Start cutting at the recommended speed and feed with a non-peck (continuous feed) cycle.

4. Drill retraction




- ① After drilling, lower the cutting revolution about 1mm-2mm short of the hole end. (Cutting speed of around 20m-30m/min)
- ② Retract the drill to the pilot hole depth starting point at a feed rate of 3000mm/min.
- ③ Finally, clear the hole at a cutting speed of 20m-30m/min and feed rate of 0.2mm-0.3mm/rev.

INTERRUPTED DRILLING


● Drilling and breaking through on irregular faces or angles

1. Spot facing



- ① Machine a flat on the irregular face by using an end mill or slot drill capable of spot facing. Make the spot face diameter the same size as the required deep hole diameter.

2. Drilling a pilot hole




- ① Use a drill with a larger (flatter) point angle than the super long type. Mitsubishi type MNS, MAE-MB or MAS-MB drill is recommended.
- ② Ensure a high precision hole is drilled for the guide.
- ③ Drill depth : Approx 1D or deeper.
(Adjust the pilot hole depth according to the length of the super long type.)

3. Initial cutting with the long type drill




- ① Penetrate the pilot hole at a low revolution. (Cutting speed 20m-30m/min, feed rate 0.2mm-0.3mm/rev)
- ② Stop the long type drill 1mm-3mm short of the pilot hole bottom.

4. Drill the deep hole




- ① Start cutting at the recommended speed and feed with a non-peck (continuous feed) cycle.

5. Breaking through



- ① When breaking through, the cutting edge can be damaged.
- ② A feed rate of 0.05mm-0.1mm/rev is recommended.

6. Drill retraction



- ① Retract the drill to the pilot hole depth starting point at a feed rate of 3000mm/min.
- ② Finally clear the hole at a cutting speed of 20m-30m/min and feed rate of 0.2mm-0.3mm/rev.

